



secret jardin

# ASSEMBLY INSTRUCTIONS



**INTENSE R4.00**

# SUMMARY



**1 KIT CONTAINS / OPTION SPACE BOOSTER & WEBIT**

**2 INT480 : CONFIGURATION 1 - MAXIMUM ACCESSIBILITY**

**3 INT480 : CONFIGURATION 2 - MAXIMUM STRENGTH**

**4 INT480K : OPTION - SPACE BOOSTER & WEBIT**

**5 INT600 : CONFIGURATION 1 - MAXIMUM ACCESSIBILITY**

**6 INT600 : CONFIGURATION 2 - MAXIMUM STRENGTH**

**7 INT600K : OPTION - SPACE BOOSTER & WEBIT**

**8 INT480 & INT600 : CANVAS ASSEMBLY / OPENING METHODS**

**9 INT480 & INT600 : LINKABILITY / BUILDING**



**PROFESSIONAL**

**INTENSE 480 & INTENSE 600 R4.00 - KIT CONTAINS**

**MOBILE FLANGE Ø315MM - 12½"**



**Ducting Flange Mobile**




**Cutting Tool**

**CABLE FLANGE Ø70MM - 2.80"**



**Cable Flange**



**Cutting Tool**

**DUCTING FLANGE Ø25MM - 1.00"**




**Ducting Flange**



**Cutting Tool**



**Connectors**



**Light Baffle**

**GENERAL**



**PocketIT**



**Pair HookIT**



**CableIT**




**StrapIT**

**PROFESSIONAL**

**OPTION SPACE BOOSTER & WEBIT**

**WITHOUT OPTION**

**WITH OPTION**

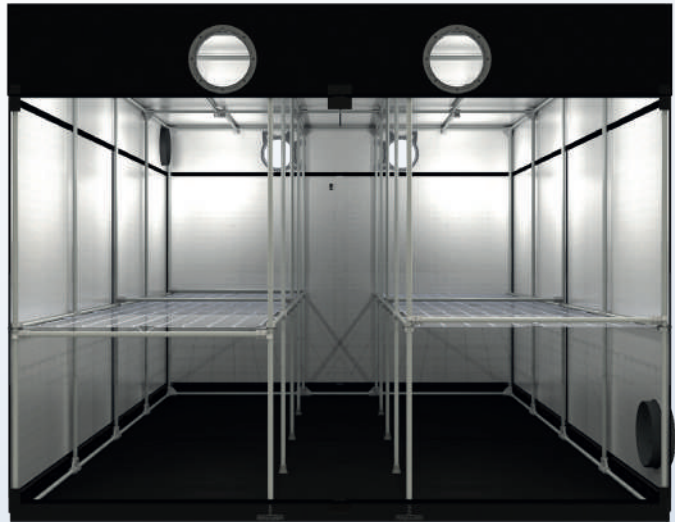

**INT480  
INT600**

**INT480 + INT480K  
INT600 + INT600K**

**VIDEO ASSEMBLY  
INT600 + 600K**

A QR code with a yellow logo in the center, enclosed in a yellow border. The QR code is intended to link to video assembly instructions for the INT600 + 600K option.




# INT480



**CONFIGURATION 1**  
**MAXIMUM ACCESSIBILITY**

**PROFESSIONAL**

**INTENSE 480 R4.00 - CONFIGURATION 1 (MAXIMUM ACCESSIBILITY)**

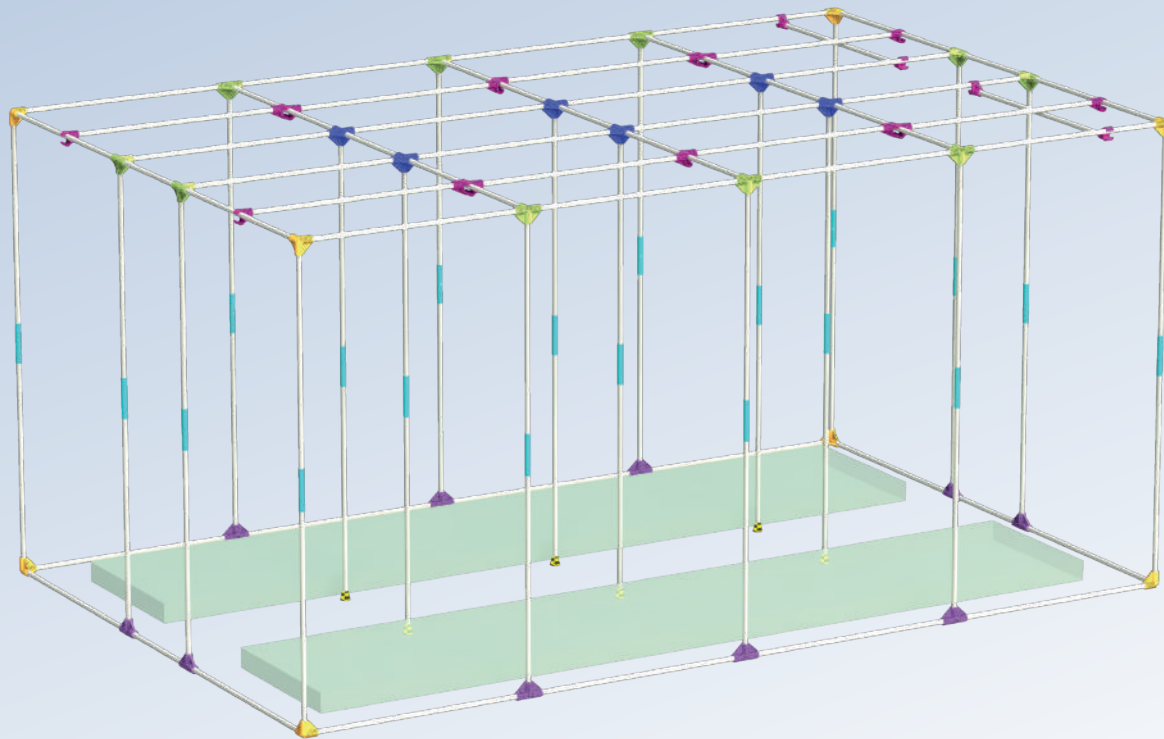

**8x C25-Y**



**10x C25-K**



**10x C25-T**



**6x C25-XI**



**20x C25-H**



**6x C25-RF**




**20x T25-Link**



 **PROFESSIONAL**

**INTENSE 480 R4.00 - CONFIGURATION 1 (MAXIMUM ACCESSIBILITY)**

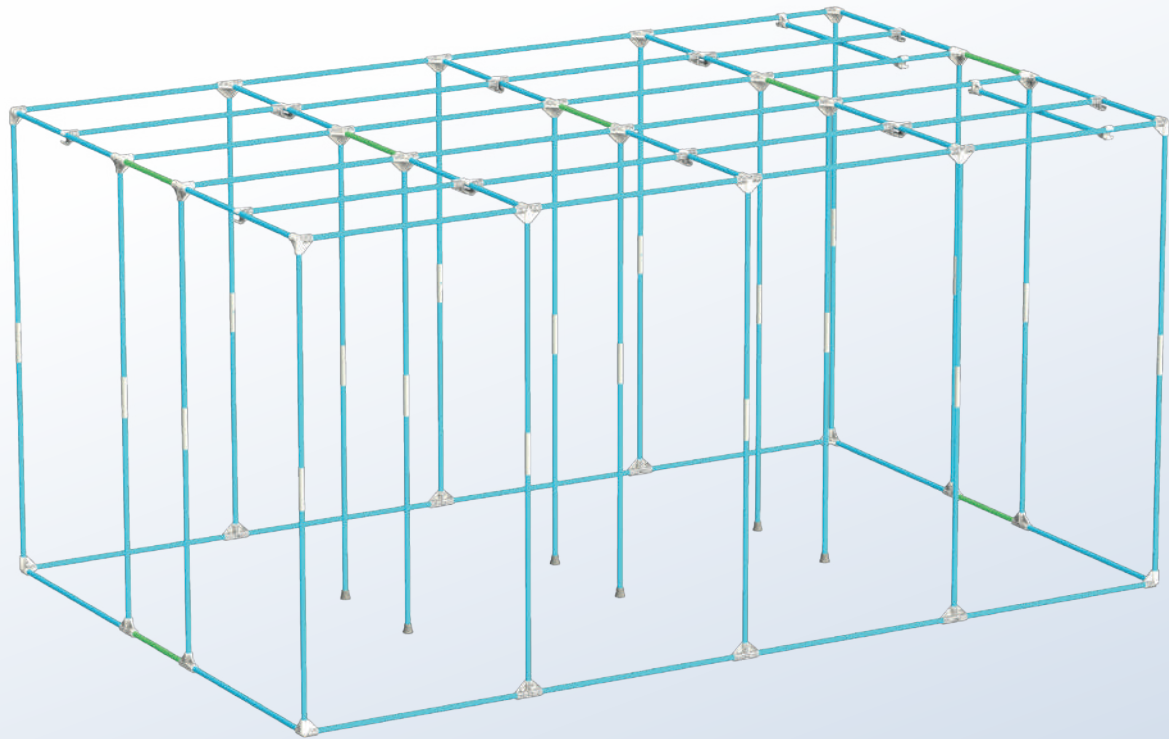

 7x T25-60

 88x T25-120

**INT480**  
CONFIG 1




# INT480



**CONFIGURATION 2**  
**MAXIMUM STRENGTH**

**PROFESSIONAL**

**INTENSE 480 R4.00 - CONFIGURATION 2 (MAXIMUM STRENGTH)**

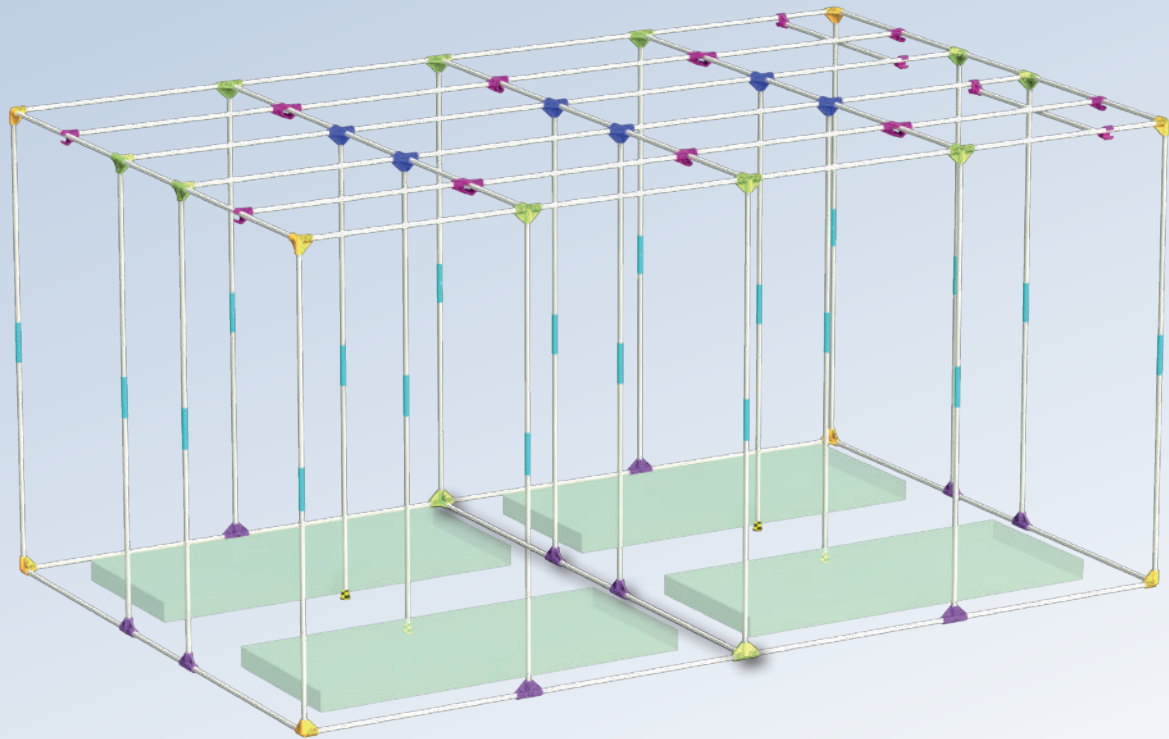

**8x C25-Y**



**12x C25-K**



**10x C25-T**



**6x C25-XI**



**20x C25-H**




**4x C25-RF**



**20x T25-Link**

 **PROFESSIONAL**

**INTENSE 480 R4.00 - CONFIGURATION 2 (MAXIMUM STRENGTH)**

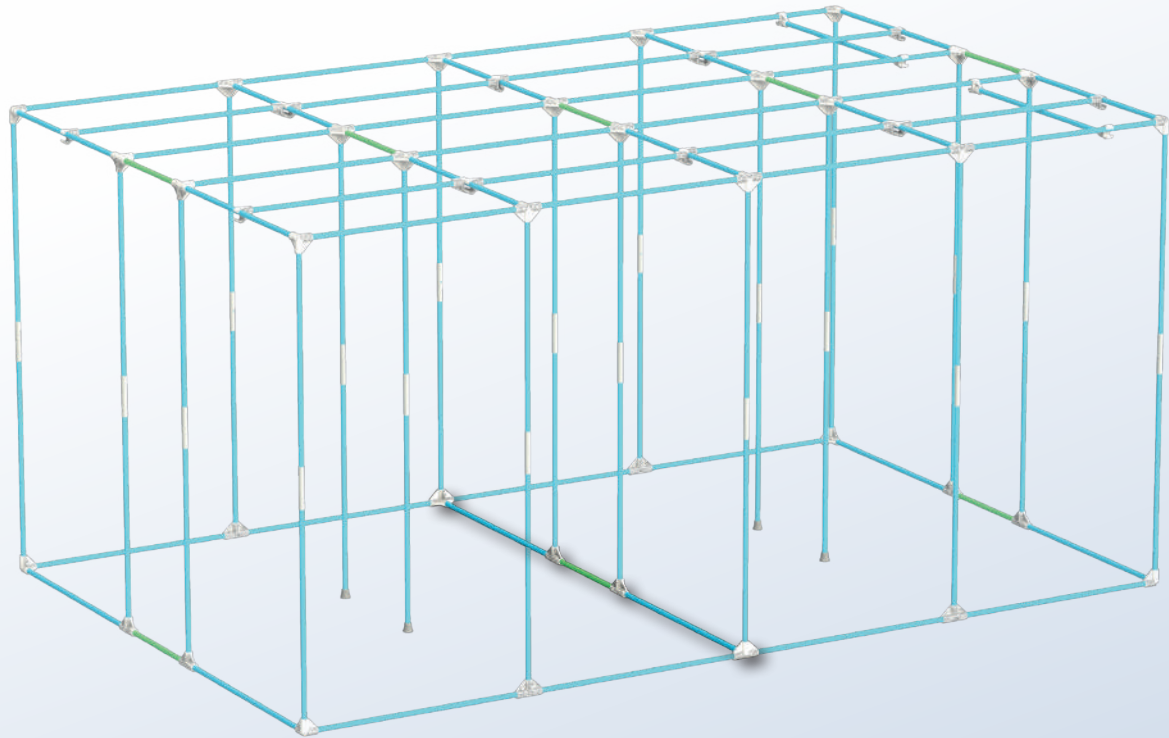

**8x T25-60**



**90x T25-120**

**INT480**  
CONFIG 2



# INT480




**SPACE BOOSTER & WEBIT  
(OPTION)**

 PROFESSIONAL

INTENSE 480 R4.00 - SPACE BOOSTER & WEBIT (OPTION)

**OPTION**

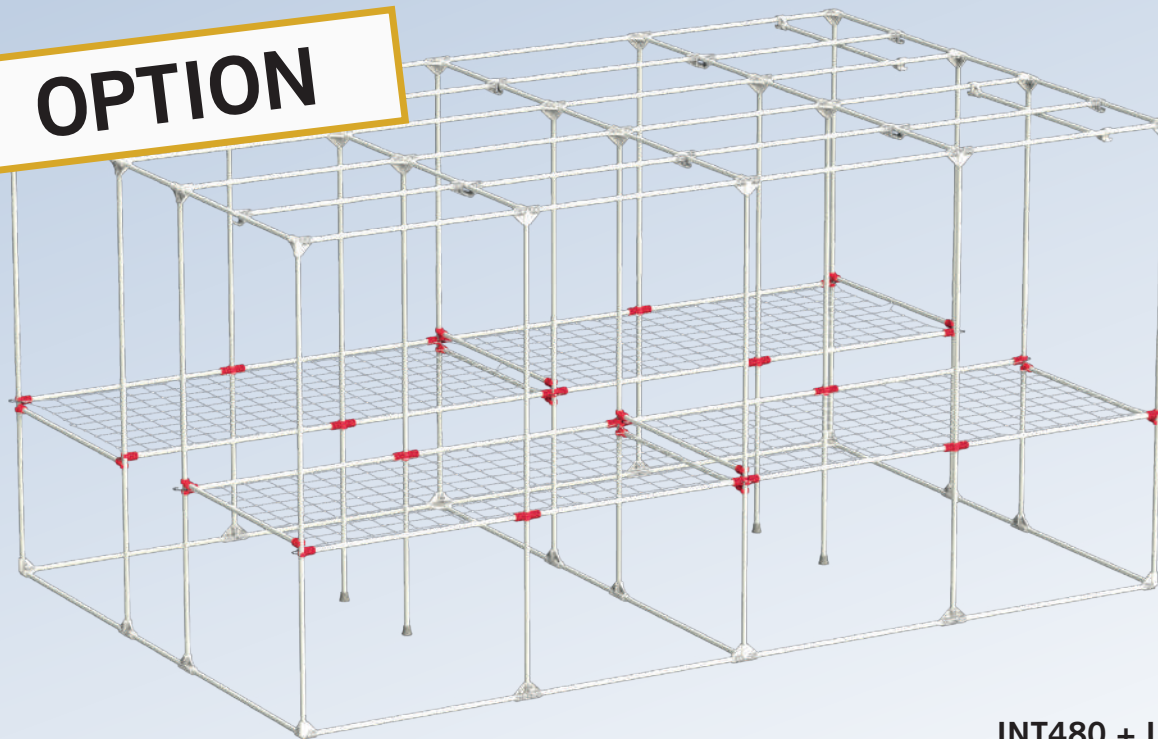

INT480 + INT480K




48x C25-SB



 **PROFESSIONAL**

**INTENSE 480 R4.00 - SPACE BOOSTER & WEBIT (OPTION)**

**OPTION**

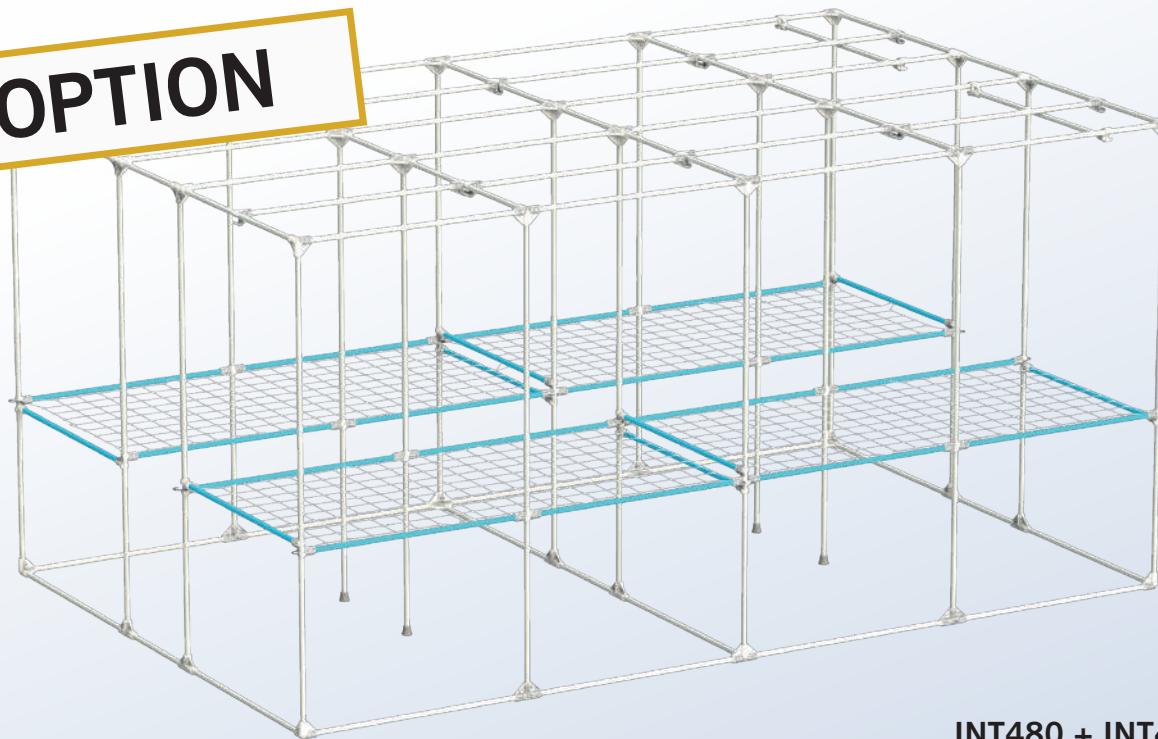

**INT480 + INT480K**

**24x T25-120**

**INT480K**  
SE & WEBIT




# INT600




## CONFIGURATION 1 MAXIMUM ACCESSIBILITY

**PROFESSIONAL**

**INTENSE 600 R4.00 - CONFIGURATION 1 (MAXIMUM ACCESSIBILITY)**

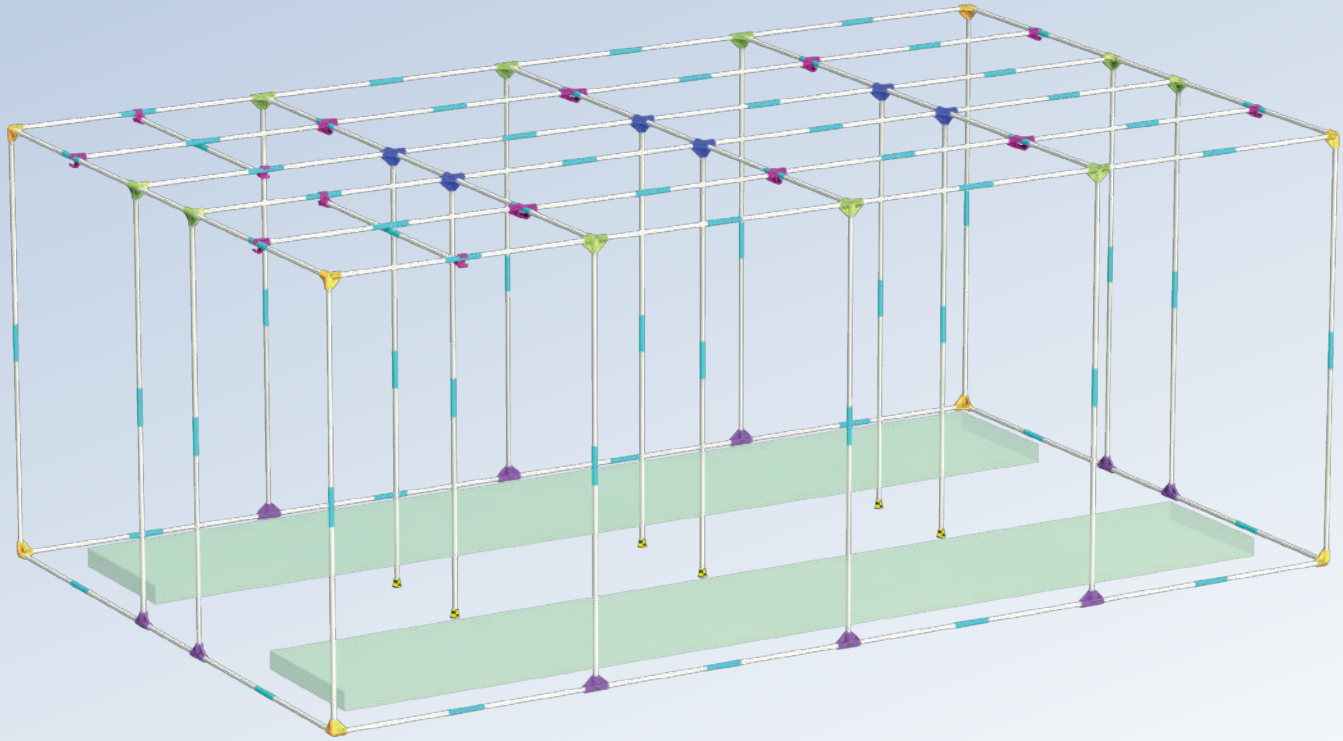

**8x C25-Y**



**10x C25-K**



**10x C25-T**



**6x C25-XI**



**20x C25-H**




**6x C25-RF**




**70x T25-Link**

 **PROFESSIONAL**

**INTENSE 600 R4.00 - CONFIGURATION 1 (MAXIMUM ACCESSIBILITY)**

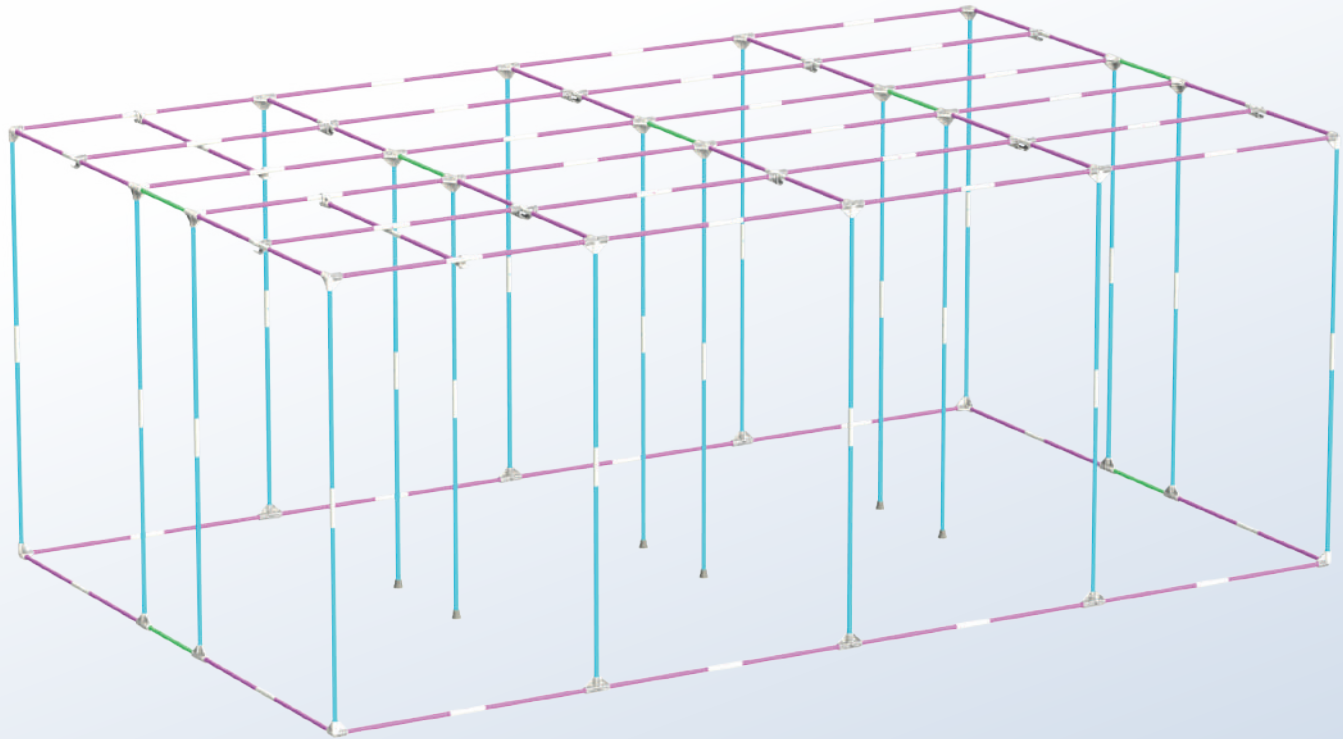

 7x T25-60

 96x T25-75

 40x T25-120




# INT600



**CONFIGURATION 2**  
**MAXIMUM STRENGTH**

**PROFESSIONAL**

**INTENSE 600 R4.00 - CONFIGURATION 2 (MAXIMUM STRENGTH)**

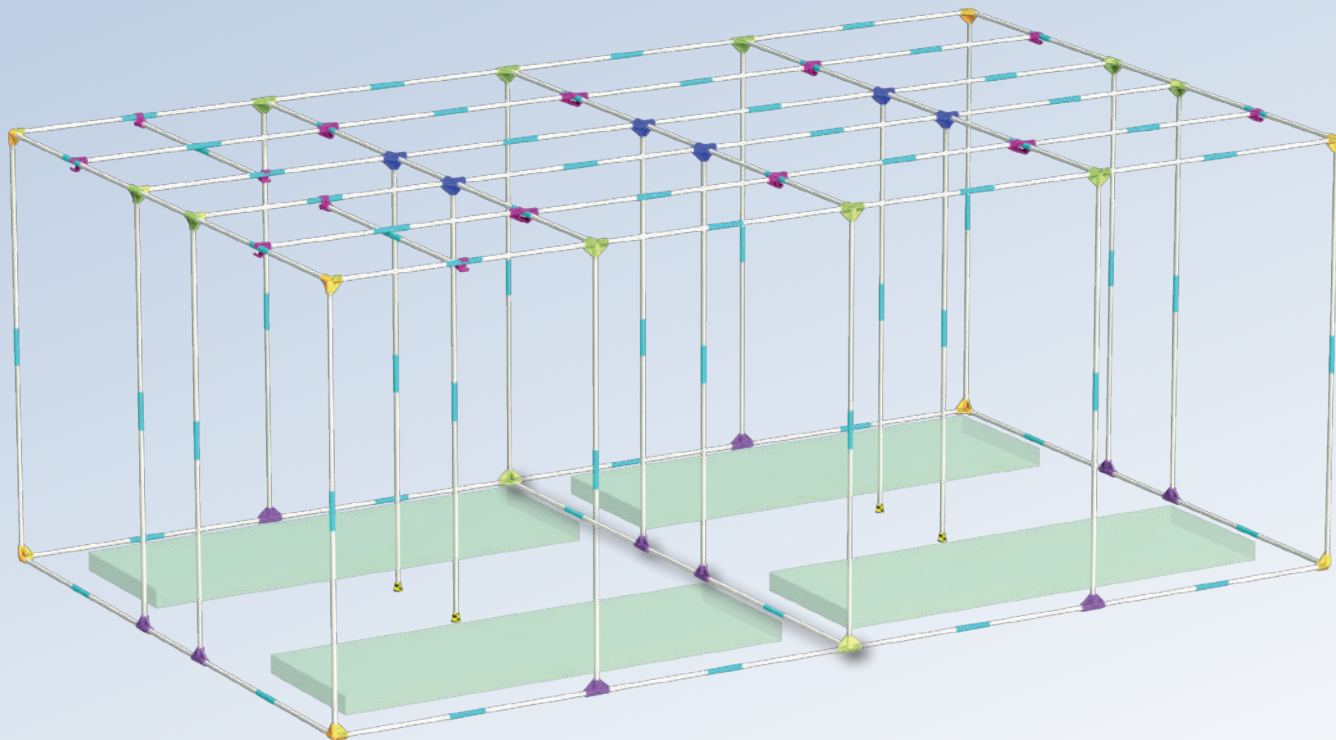

**8x C25-Y**



**12x C25-K**



**10x C25-T**



**6x C25-XI**



**20x C25-H**



**4x C25-RF**




**68x T25-Link**



 **PROFESSIONAL**

**INTENSE 600 R4.00 - CONFIGURATION 2 (MAXIMUM STRENGTH)**

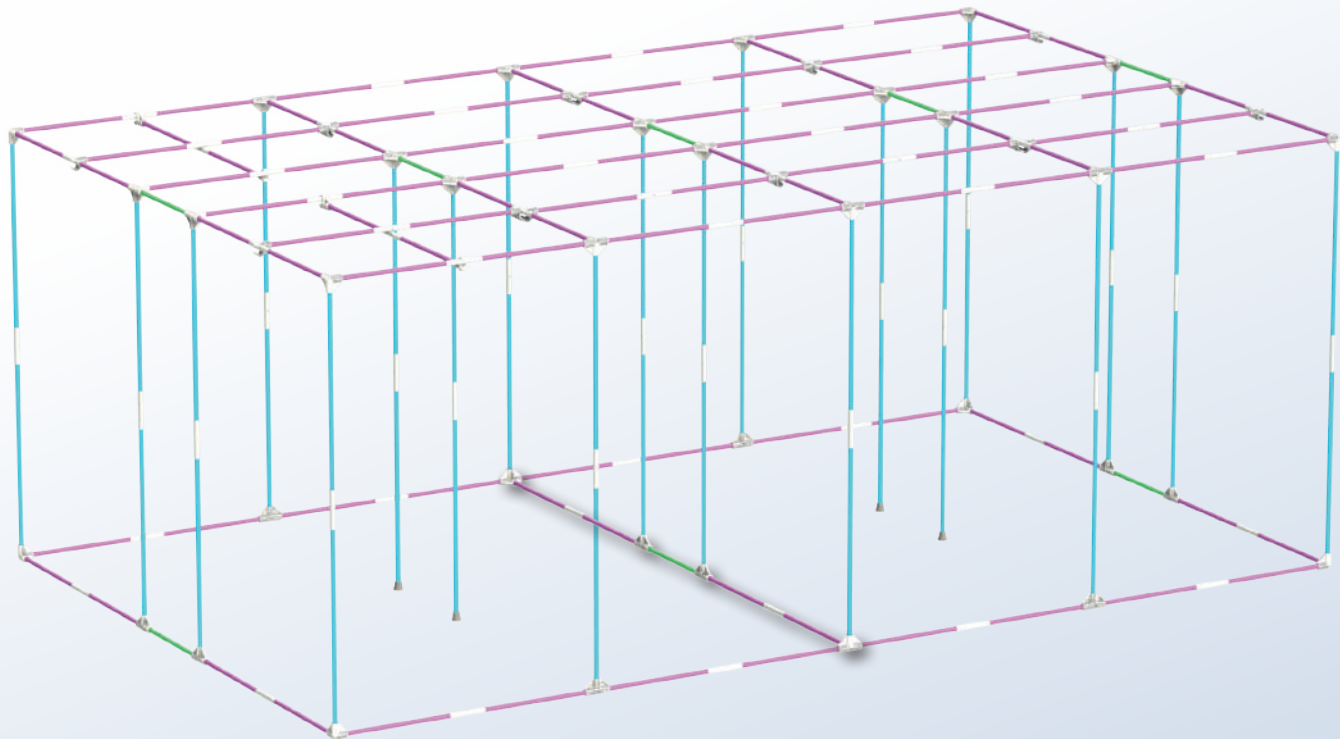

 **8x T25-60**

 **100x T25-75**

 **40x T25-120**

**INT600**  
CONFIG 2



# INT600




**SPACE BOOSTER & WEBIT  
(OPTION)**

 PROFESSIONAL

INTENSE 600K R4.00 - SPACE BOOSTER & WEBIT (OPTION)

**OPTION**

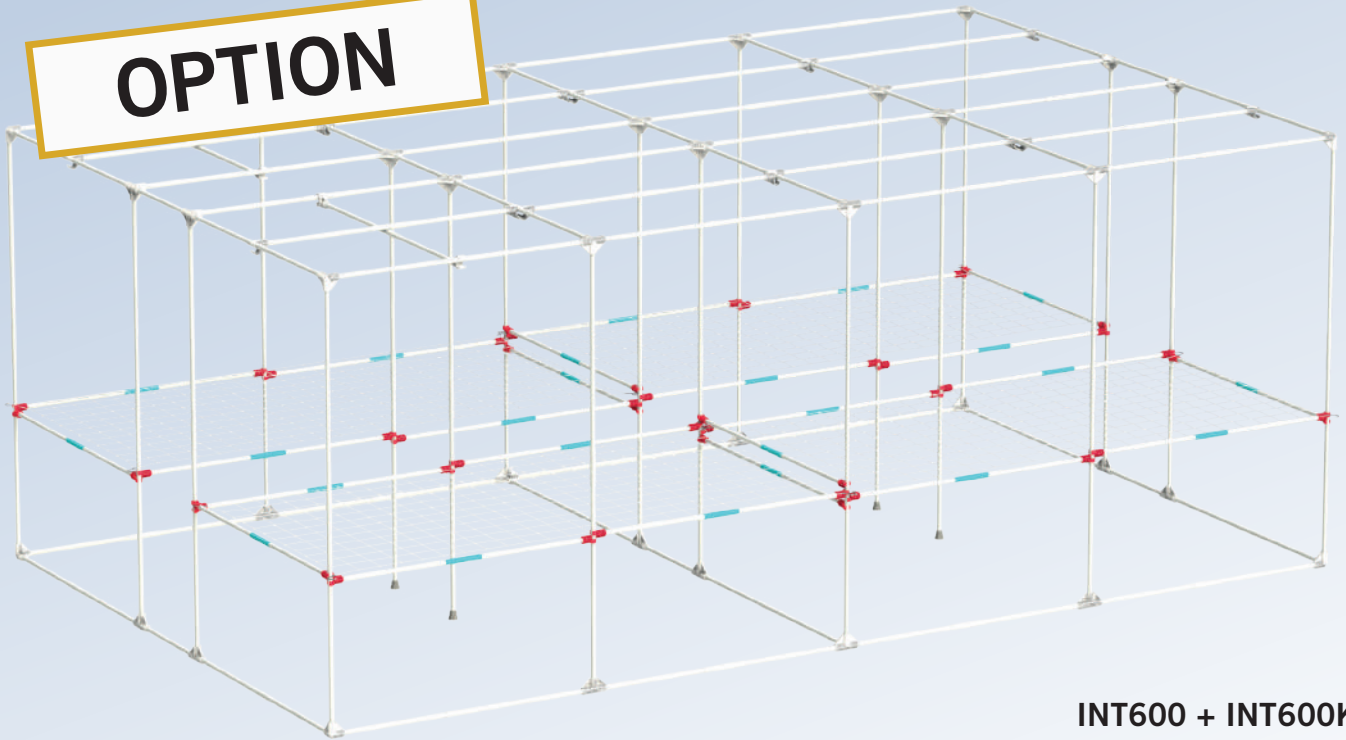

INT600 + INT600K




48x C25-SB



24x T25-Link

**OPTION**

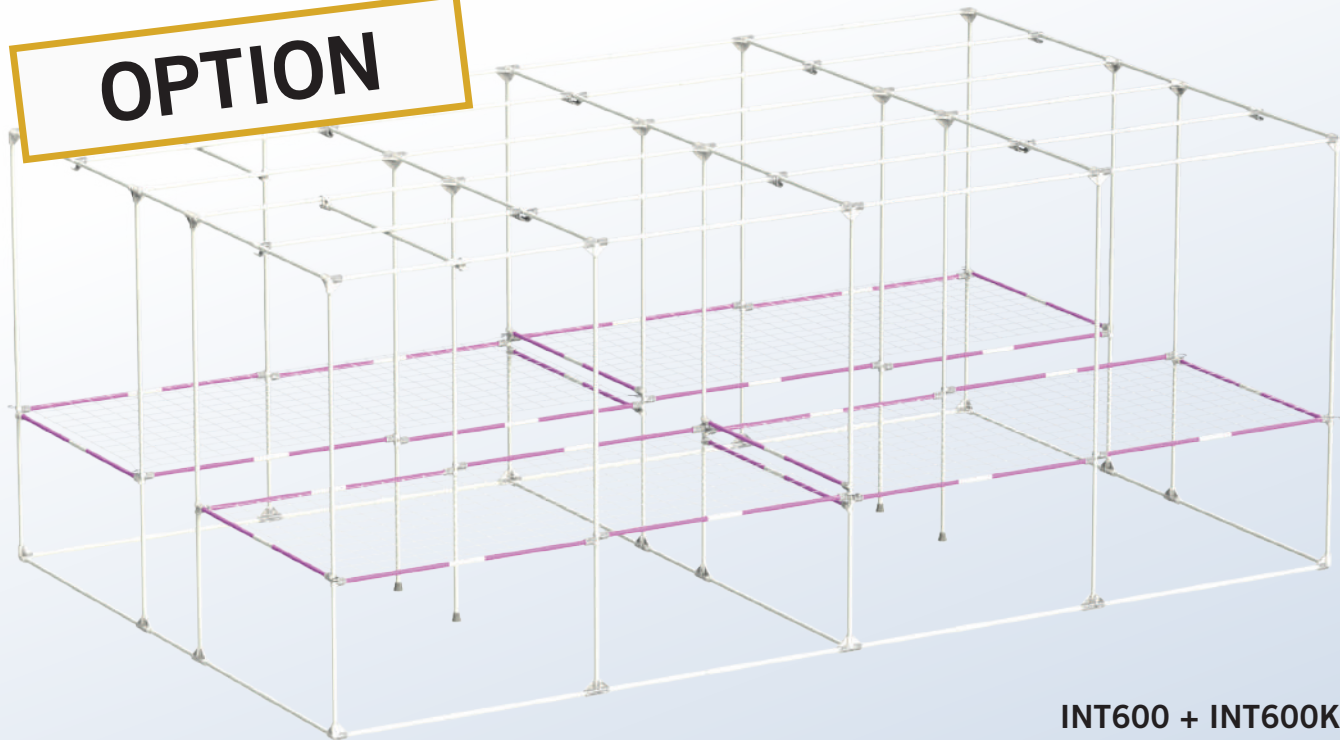

**INT600 + INT600K**


**48x T25-75**



# INT480 & INT600



**CANVAS ASSEMBLY  
& OPENING METHODS**

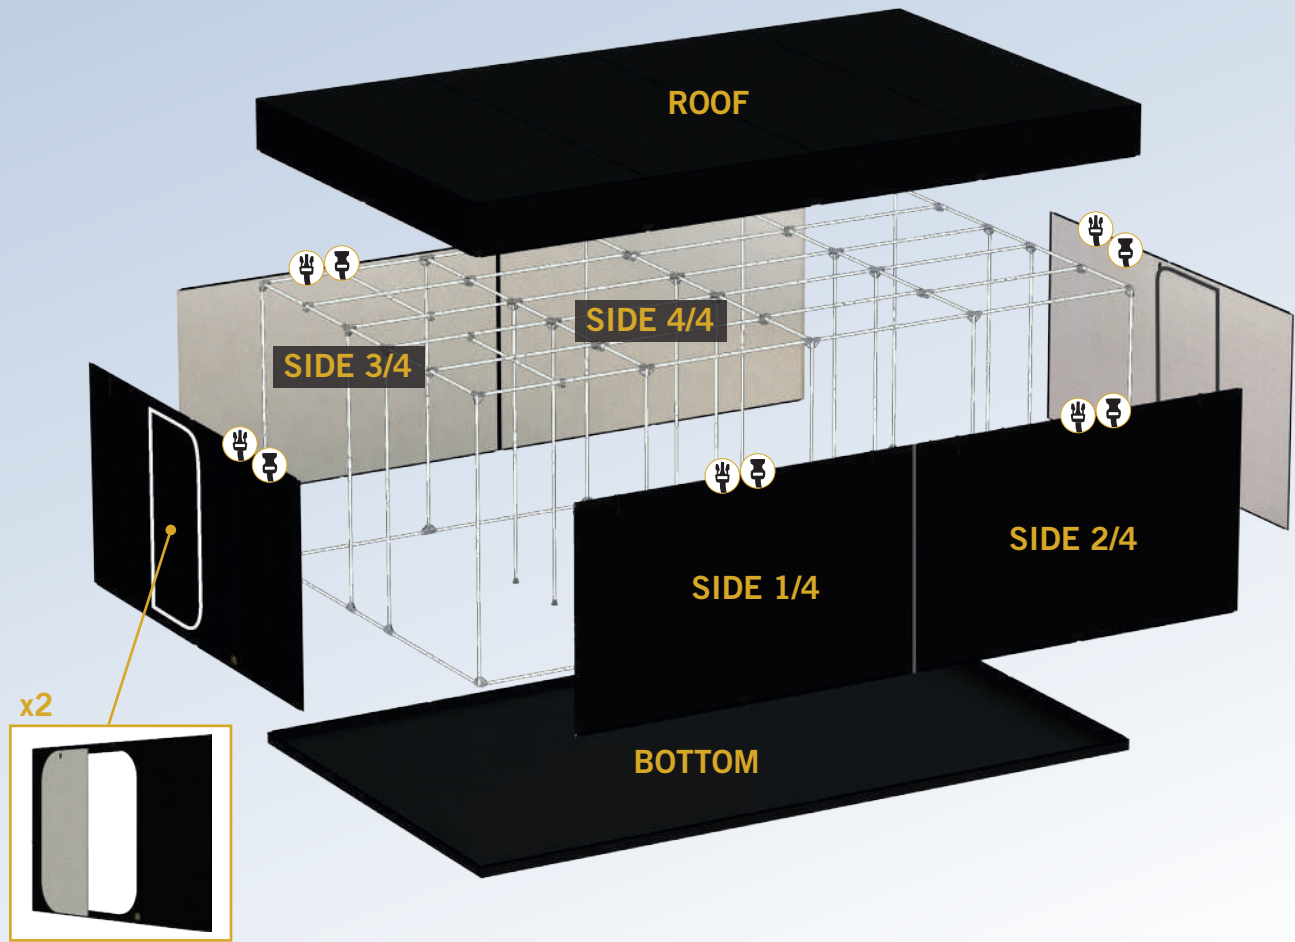







FRONT

SIDE



SOLUTION 1

SOLUTION 1

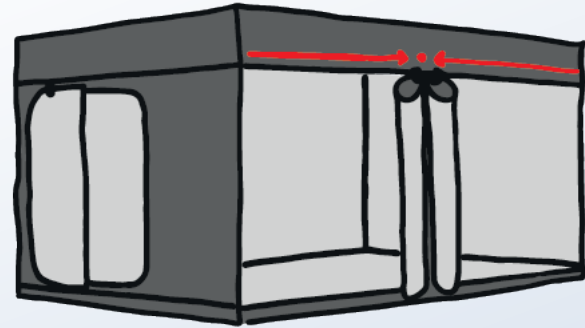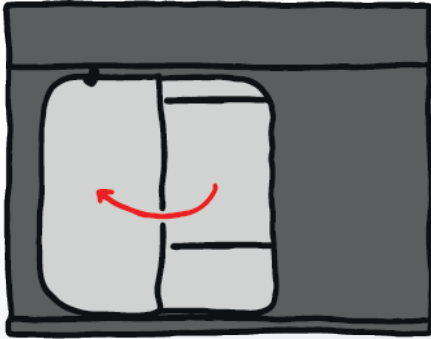

SOLUTION 2


SOLUTION 2

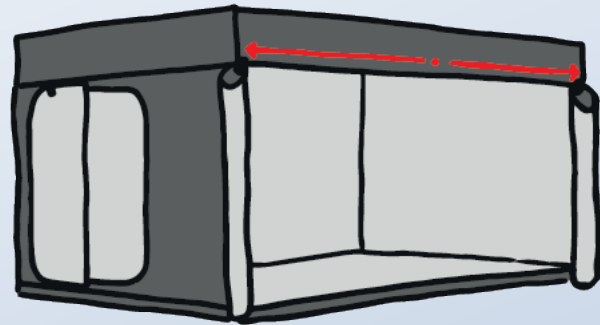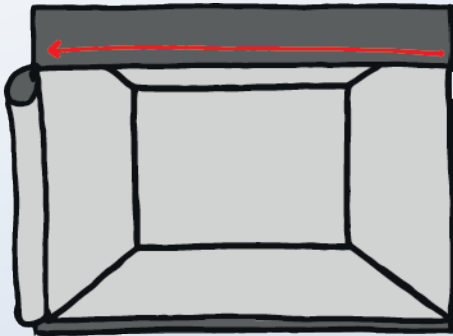

**PROFESSIONAL**

**INTENSE LINKABILITY**

**FRONT TO FRONT**

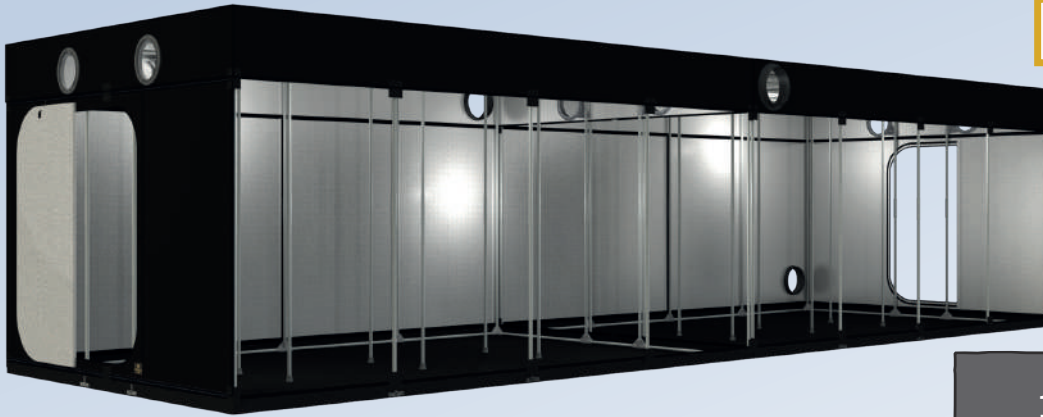

1

2

**SIDE TO SIDE**




1

2



PROFESSIONAL

INTENSE IN BUILDING

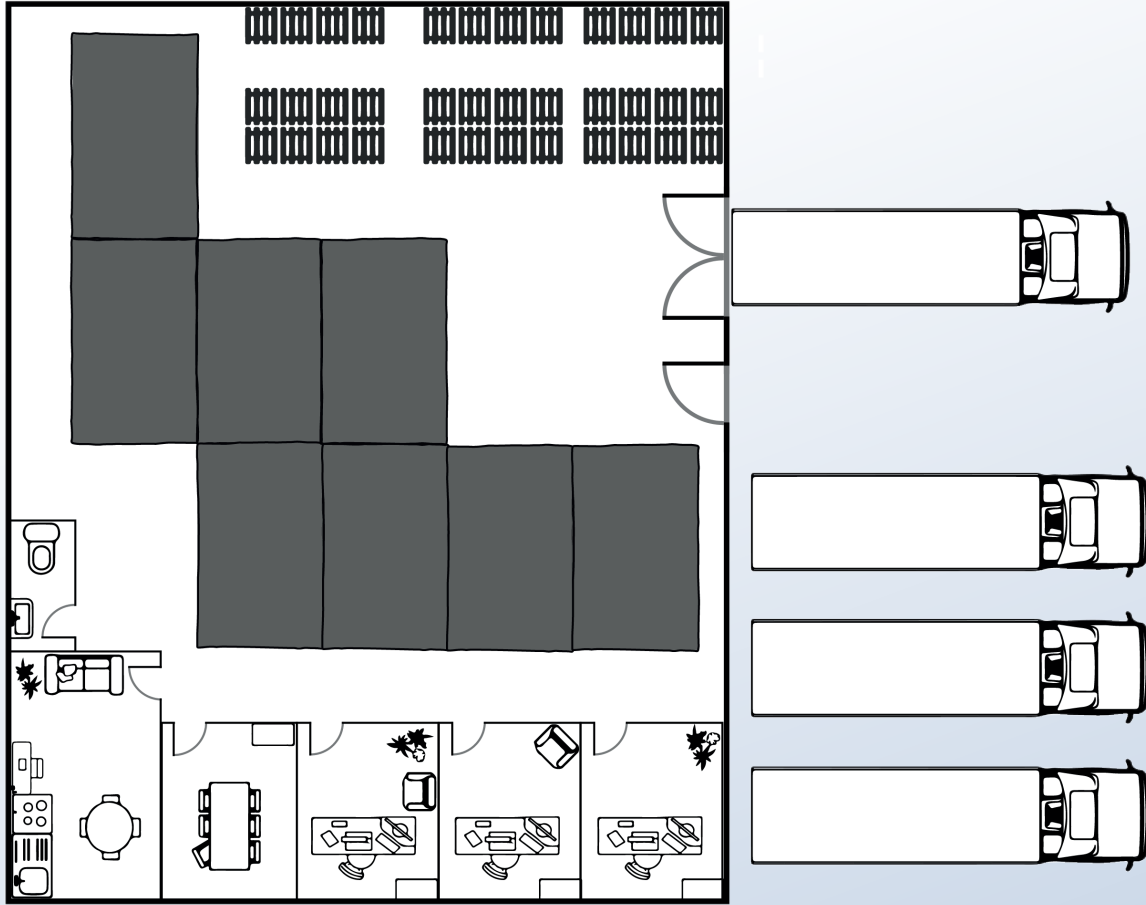

## KIT CONTAIN

REF	DESIGNATION	DESIGNATION	INTENSE		INT SPB & WEBIT	
			INT480	INT600	INT480K	INT600K
T25-60	Pole Ø25 mm 600 mm	Pole Ø1.00" 24"	8	8		
T25-75	Pole Ø25 mm 717 mm	Pole Ø1.00" 28"		100		48
T25-100	Pole Ø25 mm 967 mm	Pole Ø1.00" 38"				
T25-120	Pole Ø25 mm 1134 mm	Pole Ø1.00" 45"	90	40	24	
T25-Link	Link Ø25 mm	Link Ø1.00"	20	70		24
C25-Y	Corner Ø25 mm 3 axes Y shape	Corner Ø1.00" 3 axis Y shape	8	8		
C25-K	Corner Ø25 mm 4 axes K shape	Corner Ø1.00" 4 axis K shape	12	12		
C25-T	Corner Ø25 mm 3 axes T shape	Corner Ø1.00" 3 axis T shape	10	10		
C25-XI	Corner Ø25 mm 5 axes XI shape	Corner Ø1.00" 5 axis XI shape	6	6		
C25-H	Handling Corner Ø25 mm	Handling Corner Ø1.00"	20	20		
C25-SB	Space Booster Ø25 mm	Space Booster Ø1.00"			48	48
C25-RF	Rubber Feet Ø25 mm	Rubber Feet Ø1.00"	6	6		



[info@secretjardin.com](mailto:info@secretjardin.com)



[Secretjardin\\_](#)



[Secret Jardin Official](#)



[Secret Jardin](#)



[www.secretjardin.com](http://www.secretjardin.com)