



PRODUCT PRESENTATION 2023

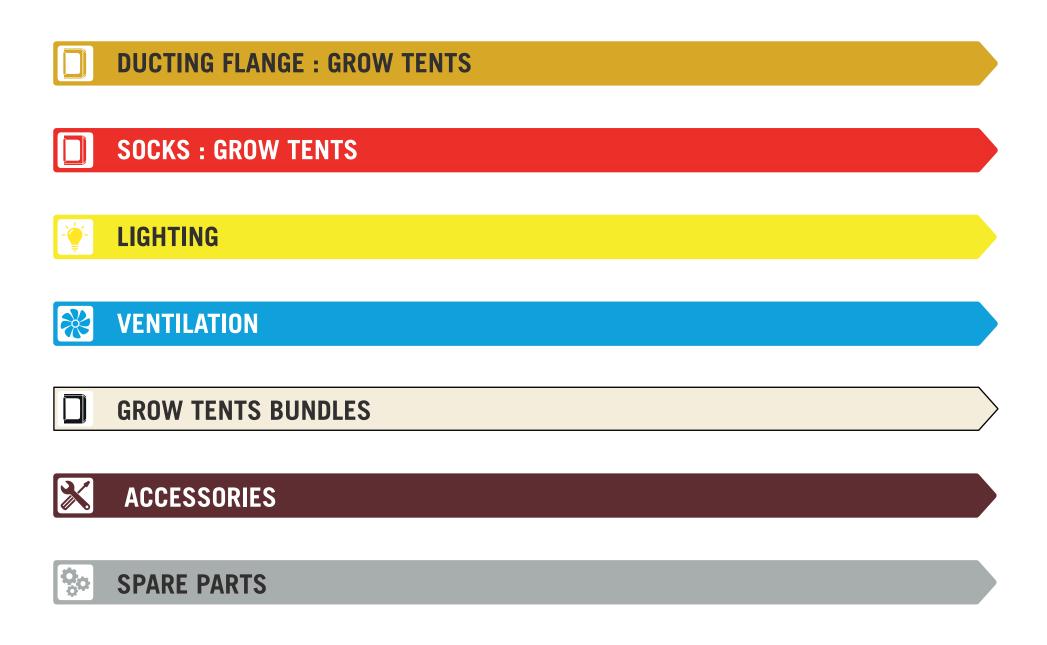

SECRET JARDIN

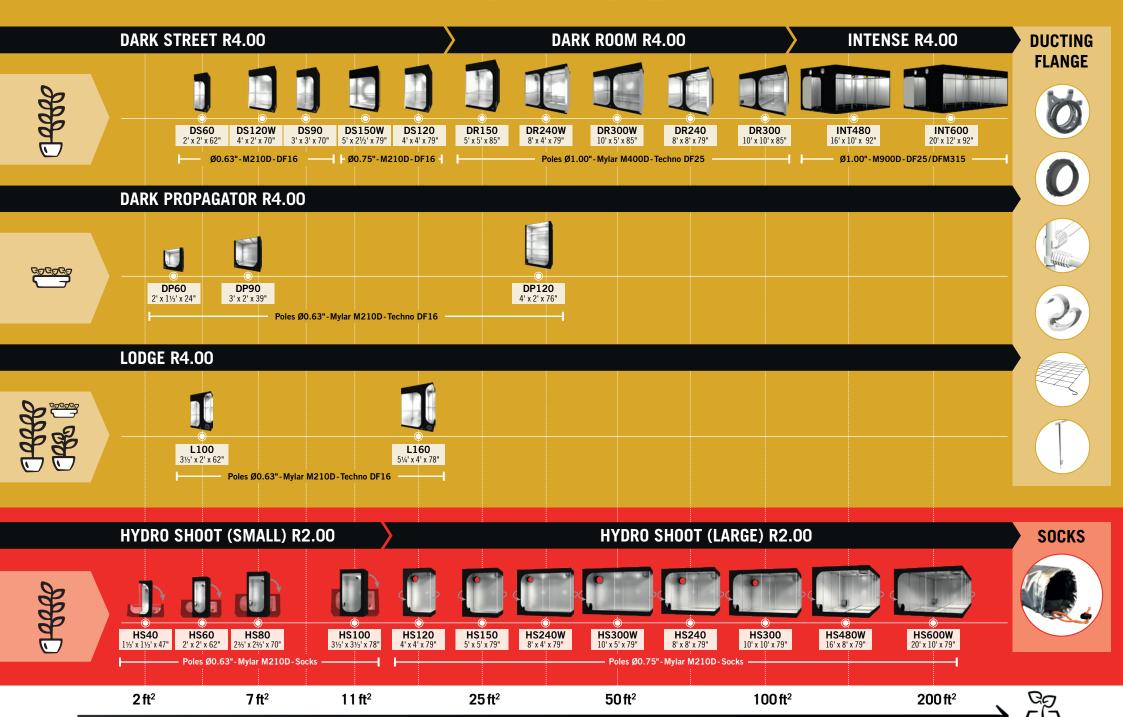

SECRET JARDIN VS HYDRO SHOOT

DIFFERENT FEATURES, SAME HIGH QUALITY!



DUCTING FLANGE

(SECRET JARDIN)



SOCKS (HYDRO SHOOT)







SAME HIGH END MATERIALS, SAME SPARE PARTS

INTENSE R4.00



DARK STREET



Ducting Flange DF16 Connector: Ø4" - 5" - 6"

MYLAR 210D



Q195 Steel Ø0.63" - 0.75"



Opening 270° Full plant access



Fully Pre-equipped Adapt to your needs



Water tray Strong & Removable



Double-flap zip

DARK ROOM



Ducting Flange DF25 Connector: $\emptyset6" - 6\frac{1}{3}" - 8" - 10"$

MYLAR 400D



#201 Stainless Steel



Accessibility 360° Front Rear & Side



Fully Pre-equipped Adapt to your needs



Strong & Removable



100% Lightproof Double-flap zip

INTENSE ****





Ducting Flange DF25 & Ducting Flange Mobile DFM315

Connector: $\emptyset6" - 6\frac{1}{3}" - 8" - 10"$

MYLAR 900D



#201 Stainless Steel Accessibility +360° Ø1.00"



Full plant access



Fully Pre-equipped Adapt to your needs



Fibered Liner Strong & Integreted



Fully Linkable Side & Front

LODGE R4.00 DARK PROPAGATOR R4.00









DARK PROPAGATOR





Ducting Flange DF16 Connector : Ø4" - 5" - 6"

MYLAR 210D

DP90 : GRID IN OPTION







Option in DP90



Removable shelves Fully Pre-equipped Adapt to your needs



Water tray Strong & Removable



100% Lightproof Double-flap zip





L160



Ducting Flange DF16 Connector : Ø4" - 5" - 6"

MYLAR 210D



Q195 Steel Ø0.63" - 0.75"



Full plant access



1 Extractor/3 Rooms Fully Pre-equipped Adapt to your needs



Water tray Strong & Removable



100% Lightproof Double-flap zip

HYDRO SHOOT (SMALL) R2.00 HYDRO SHOOT (LARGE) R2.00











SMALL HYDRO SHOOT





SOCKS

MYLAR 210D







Reflective Mylar M210D



High & Small Plants Vertical or Horizontal





100% Lightproof Double-flap zip

HS120 HS150 HS240W HS300W

LARGE HYDRO SHOOT







SOCKS

MYLAR 210D



Q195 Steel Ø0.75"



Reflective Mylar M210D



Opening 270° Full plant access




Water tray Strong & Removable



Double-flap zip

LIGHTING: PRODUCT POSITIONNING

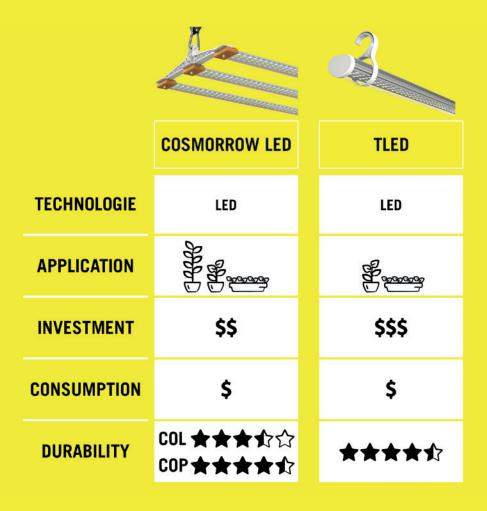

| LEVEL | LEVE

COSMORROW TECHNOLOGY

Compact, solid, water proof, durable, safe (24V)



1. COSMORROW KITS FULL SPECTRUM



2. COSMORROW TNOLED GROW SPECTRUM





IEC 60130-10 24V DC PLUG



4. COSMORROW BULBS & POWER SUPPLIES



Patent n°W02021176302









COSMORROW KITS: FULL SPECTRUM

Opto LED

SUMMER SUNLIGHT











REFERENCE	DESIGNATION	POWER	GROW AREA	PPE	PPF	PPFD AVERAGE*	BULBS INCULDED
COM60K	Cosmorrow 60W FULL SPECTRUM	60 W	2'x 11/3'	2.4 µmol/s/W	144 µmol/s	765 µmol/s/m²	3x COP20BL
COM100K	Cosmorrow 100W FULL SPECTRUM	100 W	2'x2'	2.4 µmol/s/W	240 µmol/s	728 µmol/s/m²	5x COP20BL



COSMORROW KITS: 200 - 280 - 360 W* FULL SPECTRUM



SUMMER SUNLIGHT







REFERENCE	DESIGNATION	POWER	GROW AREA	PPE (bulb)	PPF	PPFD AVERAGE*2	BULBS INCULDED	COLOR / LINE	SPECTRUM
COM200FS	Cosmorrow 200 W FULL SPECTRUM	200 W	2¾'x2¾'	2.85 µmol/s/W	540 µmol/s	1122 µmol/s/m²	5x COP40FS		1
	+1x UPGRADE 80W	280 W	3'x3'	2.85 µmol/s/W	756 µmol/s	1108 µmol/s/m²	7x COP40FS		
	+2x UPGRADE 80W	360W	31/31 x 31/31	2.85 µmol/s/W	972 µmol/s	1101 µmol/s/m²	9x COP40FS	2700 K 4000 K 6500 K 660 nm	350 400 450 500 550 600 650 700 750

* UPGRADE 80 W (sold separately)

COP40FS x2 Cosmorrow LED 40 W L36" FULL SPECTRUM

COM40 x2 Cosmorrow Power 1x40 W (Alternative: 1x COM2X40)

COSMORROW TNOLED: GROW SPECTRUM

SPRING SUNLIGHT





REFERENCE	DESIGNATION	POWER	GROW AREA	PPE	PPF	PPFD AVERAGE*	INCLUDED BULBS	COLOR / LINE	SPECTRUM
TN04065	TNoled 2x20W GROWING	40 W	2'x11/3'	2.0 µmol/s/W	80 µmol/s	355 µmol/s/m²	2x COL2065		
TN08065	TNoled 2x40W GROWING	80 W	4'x11⁄3'	2.0 µmol/s/W	160 µmol/s	363 µmol/s/m²	2x COL4065	6500 K 6500 K 6500 K	350 400 450 500 550 600 650 700 750

COSMORROW IR & UV

BOOSTER (INFRARED & ULTRAVIOLET)



Add a UV or IR booster whenever needed with our single power supply. We recommend using it with a timer separate from the main lighting.

INFRARED

- * Trigger flowering
- * Heat up your plant
- * Longer internodes

ULTRAVIOLET

- * Boost immune system
- * Fights mould
- * Shorter internodes

BULBS

REFERENCE	DESIGNATION	PPF	COLOR / LINE	SPECTRUM	
COL20IR	Cosmorrow Led 20W L20" IR	34 µmol/s	2100 K 730 nm 2100 K	200 eko eko 180 500 eko eko 170 710	COL20IR
COL20UV	Cosmorrow Led 20W L20" UV	32 µmol/s	6500 K 365 nm 6500 K		COL20UV

LIGHTING FIXTURE (EXC. BULB)

REFERENCE	DESIGNATION	POWER MAX
C0M20	Cosmorrow Power 1x20W	20 W





COSMORROW BULBS & POWER SUPPLY





COP20BL

BULBS

REFERENCE	DESIGNATION	PPE	PPF	COLOR / LINE	SPECTRUM
COP2065	Cosmorrow Led 20W L20" GROW	2.7 µmol/s/W	54 µmol/s	6500 K 6500 K 6500 K 6500 K	350 400 400 500 500 600 600 700 700
C0L4065	Cosmorrow Led 40W L36" GROW	2.0 µmol/s/W	80 µmol/s	6500 K 6500 K 6500 K	350 400 400 500 500 600 600 700 720
COP20BL	Cosmorrow Led 20 W L 20" FULL SPECTRUM	2.4 µmol/s/W	48 µmol/s		1. 1
COP40FS	Cosmorrow Led 40 W L 28" FULL SPECTRUM	2.85 µmol/s/W	114 µmol/s	2700 K 4000 K 6500 K 660 nm	350 400 450 500 550 600 650 700 750

LIGHTING FIXTURE (EXC. BULB)

REFERENCE	DESIGNATION	POWER MAX
COM20	Cosmorrow Power 1x20W	20 W
COM40	Cosmorrow Power 1x40W	40 W





Secret Jardin

TLEDA 50.000-HOUR LIFETIME





TLED4625



TLED2630



BULBS

REFERENCE	DESIGNATION	PPE	PPF	SPECTRUM
TLED2630	TLED 26W L21" FULL SPECTRUM	2.0 µmol/s/W	52 µmol/s	
TLED4230	TLED 42W L38" FULL SPECTRUM	2.0 µmol/s/W	84 µmol/s	350 450 450 500 500 600 650 750 750
TLED2665	TLED 26W L21" GROWING	2.0 µmol/s/W	52 µmol/s	
TLED4265	TLED 42W L38" GROWING	2.0 µmol/s/W	84 µmol/s	350 400 450 500 550 600 500 750 750











Secret Jardin

VENTILATION

1. EXTRACTORS & FILTERS



2. DUCTING FLANGE



3. MONKEY FAN



EXTRACTOR & FILTERS: LAYOUT

DF16 EXTRACTORS





DF16 FILTERS

DF16F100 0.9 lb - 60 cfm



DF16F150 2.0 lb – **90cfm**



DF16F250 3.0 lb - 150 cfm



DF16F350



DF16 CONNECTORS

DF16100 DF16 – Ø4"



DF16125

DF16 - Ø5"









DF16 Techology
No tools needed



Ma

Max/Min Airflow User controlled




Intelligent Speed Control



High Quality Carbon


2 THERMAL SENSORS

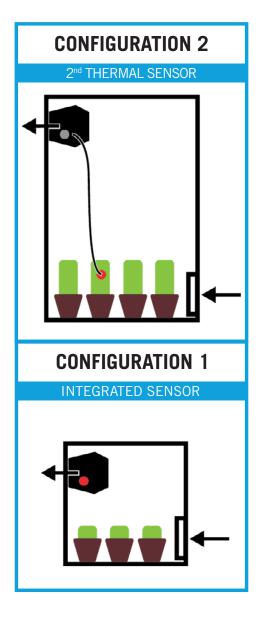

EXTRACTOR & FILTERS



CONNECT TO REGULAR DUCTING



EXAMPLES USING CONNECTORS



CONNECT TO DUCTING FLANGE



EXAMPLES WITH DUCTING FLANGE



MALES: DEVICES

Extractor



Filter



Connector



FEMALES: LINKS

Ducting Flange*



Ring**



- * Includes a recess for Light Baffle
- ** Extractors include two rings

DUCTING FLANGE



CONNECT SECRET JARDIN PERIPHERALS TO YOUR TENT



DUCTING FLANGE

DF16 Kit for 0.63" to 0.75" poles
DF25 Kit for 1.00" poles

EXTRACTOR

DF16E350 DF16 Extractor T° 90/150/210 cfm
DF16E150 DF16 Extractor T° 30/60/90 cfm

FILTER

 DF16F100
 DF16 Filter CTC80 0.9 lb 60 cfm

 DF16F150
 DF16 Filter CTC80 2.0 lb 90 cfm

 DF16F250
 DF16 Filter CTC80 3.0 lb 150 cfm

 DF16F350
 DF16 Filter CTC80 4.0 lb 210 cfm

CONNECTOR

For DF16 : Ø4" – Ø5" – Ø6" For DF25 : Ø6" – Ø6½" – Ø8" – Ø10"

CREATE PASSIVE INTAKES



LIGHT BAFFLE

DF16LB DF16 Light Baffle with Mesh
DF25LB DF25 Light Baffle with Mesh

- Lightproof
- Increase your airflow or decrease your extraction needs
- Reduces stress on the tent
- Homogenize your tent atmosphere

SINGLE INTAKE





Choose your placement
Front, sides, bakside, tent roof



Supporting up to 6.5 lb






Cutting tool is included

CREATE A Ø12" CONNECTION FLANGE



DFM315K

MOBILE DUCTING FLANGE Ø12"





Cutting tool is included



Through any flexible wall
Up to 0.1" thickness



Easy to install No screw needed





Choose your placement Front, sides, backside, tent roof

SECRET JARDIN

MONKEY FAN



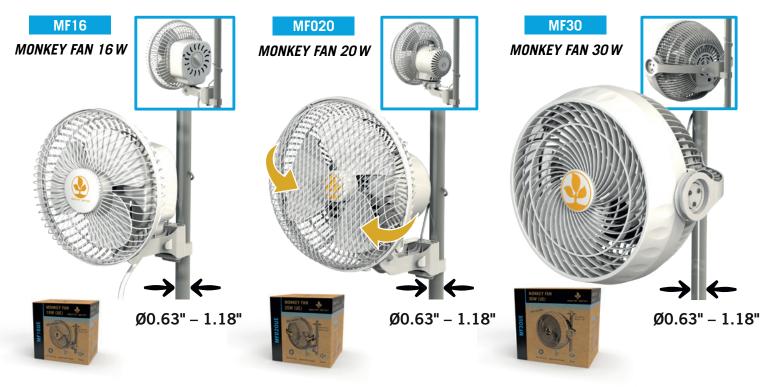

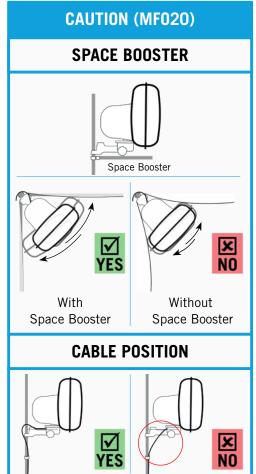

DURABILITY IN CLEAN ENVIRONMENT (LIFE TIME)

24/24 h = 6 months

12/24 h = 12 months

6/24h = 24 months







1. CLONING KITS



2. GROWING KITS



3. FULL SPECTRUM KITS







DP60CL

CLONING KIT 2'x 11/3'x 24"

The most compact solution for cloning application.

This bundle is made to fit one cloning tray. Easily maintain an high relative humidity thanks to the closed atmosphere.



DP60GR

GROWING KIT 2'x 11/3'x 24"

Ideal space to host seedlings, cuttings or mother plants

This bundle is perfect to offer a complementary room to your setup. The early spring sunlight will fit all stage up to begining of growing.



DP90GR

GROWING KIT 3'x2'x39"

Ideal bundle for seedlings, mother plants and growing stage

This bundle offers a 3'x2' space ideal for growing. The height of the lamps can be adjusted to suit different heights of plants.

#	REFERENCE	DESIGNATION
1x	DP60	Dark Propagator 2'x11/3'x24"
1x	COP2065	Cosmorrow Led 20W GROWING
1x	COM20	Cosmorrow Power 1x20W

#	REFERENCE	DESIGNATION
1x	DP60	Dark Propagator 2'x1⅓'x24"
1x	COP2065	Cosmorrow Led 20W GROWING
1x	COM20	Cosmorrow Power 1x20W
1x	DF16E150	DF16 Extractor T° 30/60/90 cfm
OPTION	DF16F100	DF16 Filter CTC80 0.9 lb 60 cfm

#	REFERENCE	DESIGNATION
1x	DP90	Dark Propagator 3'x2'x39"
2x	TN04065	TNoled 2x20W GROWING
1x	DF16E150	DF16 Extractor T° 30/60/90cfm
OPTION	DF16F100	DF16 Filter CTC80 0.9 lb 60 cfm
OPTION	MF16BB	Monkey Fan 16W Ball Bearing

1x COP2065 - Average PPFD: 305µmol/s/m², d=6"



24 V **Energy saving** 100% Safe



Closed environment Easy high humidity



Easy assembly

1x COP2065 - Average PPFD: 305µmol/s/m², d=6"



24 V Light & Extraction included 100% Safe



Controlled atmosphere Temperature



Easy assembly No tools required

2x TNO4065 - Average PPFD: 312µmol/s/m², d=6"



24 V Light & Extraction included 100% Safe



Controlled atmosphere Temperature





Easy assembly No tools required





DP120GR

GROWING KIT 4'x2'x76"

Convert 7.5 ft2 into up to 32 ft2 of seedlings, cutting and mother plants all year round

Seedling, cutting, mother plant all in one tent for professional growers. Remove grids and reposition lamps to create higher spaces with higher light intensity.

#	REFERENCE	DESIGNATION
1x	DP120	Dark Propagator 4'x2'x75"
5x	C0L4065	Cosmorrow Led 40W GROWING
5x	C0M40	Cosmorrow Power 1x40W
1x	DF16E150	DF16 Extractor T° 30/60/90 cfm
OPTION	DF16F100	DF16 Filter CTC80 0.9 lb 60 cfm
OPTION	MF16BB	Monkey Fan 16W Ball Bearing

1x COL4065 - Average PPFD: 120µmol/s/m², d=6"







Controlled atmosphere





DS60FS

FULL SPECTRUM KIT 2'x2x62"

2'x2' full spectrum setup ideal for a whole cycle from seed to harvest

It will provide a summer sunlight to your plants (PPFD > 600). Remove LED strips to dim your lighting and create a growing stage setup.

#	REFERENCE	DESIGNATION
1x	DS60	Dark Street 2'x2'x62"
1x	COM100K	Cosmorrow Kit 100W Full Spectrum
1x	DF16E150	DF16 Extractor T° 30/60/90 cfm
1x	DF16F150	DF16 Filter CTC80 2.0 lb 90 cfm
1x	MF16BB	Monkey Fan 16W Ball Bearing

1x COM100K - Average PPFD: 728µmol/s/m², d=6"



All in one Light & Extraction included



Fits for full crop cycle



Temperature





DS90FS

FULL SPECTRUM KIT 3'x3'x70"

3'x3' full spectrum setup ideal for a whole cycle from seed to harvest

It will provide a summer sunlight to your plants (PPFD > 600). Remove LED strips to dim your lighting and create a growing stage setup or add optional COP40FS for higher intensity lighting.

#	REFERENCE	DESIGNATION
1x	DS90	Dark Street 3'x3'x70"
1x	COM200FS	Cosmorrow Kit 200W Full Spectrum
1x	DF16E350	DF16 Extractor T° 90/150/210 cfm
1x	DF16F250	DF16 Filter CTC80 3.0 lb 150 cfm
1x	MF020BB	Monkey Fan 20W Osc. Ball Bearing
OPTION	UPGRADE 80W:	
2x	COP40FS	Cosmorrow Led 40W Full Spectrum
2x	COM40	Cosmorrow Power 1x40W

1x COM200FS - Average PPFD: 790µmol/s/m², d=8" 1x COM200FS + 1x UPGRADE 80W - Average PPFD: 1101µmol/s/m², d=10"



Light & Extraction included



Full Spectrum Fits for full crop cycle



Controlled atmosphere



Easy assembly





DS120WFS

FULL SPECTRUM KIT 4'x2'x70"

4'x2' full spectrum setup ideal for a whole cycle from seed to harvest

This setup will provide a summer sunlight to your plants (PPFD > 600). Adjust the height of the 2 lighting systems separately to follow your plant growth. Remove LED strips to dim your lighting and create a growing stage setup.

#	REFERENCE	DESIGNATION
1x	DS120W	Dark Street 4'x2'x70"
2x	COM100K	Cosmorrow Kit 100W Full Spectrum
1x	DF16E350	DF16 Extractor T° 90/150/210cfm
1x	DF16F250	DF16 Filter CTC80 3.0 lb 150 cfm
1x	MF020BB	Monkey Fan 20W Osc. Ball Bearing

2x COM100K - Average PPFD: 773µmol/s/m², d=6"



Fits for full crop cycle



Controlled atmosphere

Temperature



No tools required



DS150WFS

FULL SPECTRUM KIT 5'x21/2'x79"

5'x 21/2' full spectrum setup ideal for a whole cycle from seed to harvest

It will provide a summer sunlight to your plants (PPFD > 600). Adjust the height of the 2 lighting systems separately to follow your plant growth. Remove LED strips to dim your lighting and create a growing stage setup.

#	REFERENCE	DESIGNATION
1x	DS150W	Dark Street 5'x21/2'x79"
2x	COM200FS	Cosmorrow Kit 200W Full Spectrum
1x	DF16E350	DF16 Extractor T° 90/150/210cfm
1x	DF16F350	DF16 Filter CTC80 4.0 lb 210 cfm
1x	MF020BB	Monkey Fan 20 W Osc. Ball Bearing

2x COM200FS- Average PPFD: 1153µmol/s/m², d=8"













Easy assembly



L100FS

FULL SPECTRUM KIT 31/3 'x 2' x 62"

Non-stop harvest with a 3x rooms tent: cutting & mother plant, growing and flowering

This bundle allows you to have 3 different grow stages in one tent. Light intensity and spectrum is dimensionned for each areas. Use only one extractor to control temperature in the whole tent thanks to the Ducting Flange system!

#	REFERENCE	DESIGNATION
1x	L100FS	Lodge 31/3 x 2 x 62"
1x	COM100K	Cosmorrow Kit 100W Full Spectrum
1x	TN04065	TNoled 2x20 W GROWING
1x	C0P2065	Cosmorrow Led 20W GROWING
1x	C0M20	Cosmorrow Power 1x20W
1x	DF16LB	DF16 Light Baffle with Mesh
1x	DF16E150	DF16 Extractor T° 30/60/90 cfm
1x	DF16F150	DF16 Filter CTC80 2.01b 90cfm
1x	MF16BB	Monkey Fan 16W Ball Bearing

1x COM100K - Average PPFD: 728µmol/s/m², d=6" 1x COP2065 - Average PPFD: 305µmol/s/m², d=6" 1x TNO4065 - Average PPFD: 355µmol/s/m², d=6"







Controlled atmosphere Fits for full crop cycle Temperature






ACCESSORIES


1. DRYERS



2. WEB PLANT SUPPORTS



3. REMOVABLE WATER TRAY



3. CABLES & WATER PIPES INSTALLATIONS



3. SUPPORT & REINFORCEMENT





6. TENT REPAIR KITS









DRYIT90

Ø31" 5 LAYERS H63"



SECRET JARDIN

WEB PLANT SUPPORT

WEBTH: Thread / small sizes - WEBIT: Elastic / Large sizes






THREAD WEB PLANT SUPPORT

WEBIT

ELASTIC WEB PLANT SUPPORT

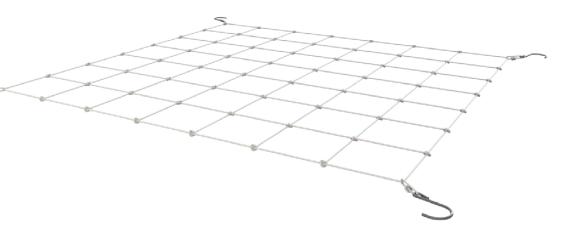

ALONE	WITH SPACE BOOSTER

WEBTH

THREAD

WEBTH60	24"x 24"
WEBTH90	36"x 36"
WEBTH120	48"x48"
WEBTH120W	48"x 24"
WEBTH150W	60"x 30"

Mesh Size = 4"x4"

WEBIT

ELASTIC

WEBIT120	48"x48"
WEBIT150	60"x60"
WEBIT240W	96"x48"
WEBIT300W	120"x60"

Mesh Size ≈ 5"x5"

REMOVABLE WATER TRAY





WTL60	24"x24"x2"
WTL90	36"x36"x2"
WTL120	48"x48"x2"
WTL150	60"x60"x2"

WTL120W	48"x24"x2"
WTL150W	60"x30"x2"
WTL240W	96"x48"x2"
WTL300W	120"x60"x2"



CABLES & WATER PIPES INSTALLATIONS

CABLEIT16

FOR POLE Ø0.63"

CABLEIT19

FOR POLE Ø0.75"

CABLEIT25

FOR POLE Ø1.00"











CF7D

KIT CABLE FLANGE DOUBLE SOCKS
















Easy to install


SUPPORTS & REINFORCEMENT





SPACE BOOSTER


















Supports the WebIT




Height Adjustable

HANDLING



20 lb max 40 lb max Ø0.63" 30 lb max 60 lb max Ø0.75" 50 lb max 100 lb max Ø1.00"










Secure Attachment Double hook system

SUPPORT IT

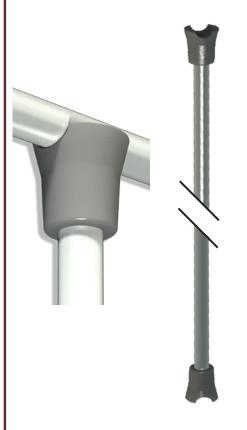







Reinforces your tent

SUPPORTS & REINFORCEMENT



DVDK	STREET															
DAIN SINLLI		STRUCTURE			HANDLING POLES INCLUDED					SPACE BOOSTER INCLUDED						
REF	DESIGNATION	DS60	DS90	DS120	DS120W	DS150W	DS60	DS90	DS120	DS120W	DS150W	DS60	DS90	DS120	DS120W	DS150W
T16-60	Pole Ø0.63" 22"	12			4		2					4			2	
T16-90	Pole Ø0.63" 34"		16		8			2					4			
T16-100	Pole Ø0.63" 38"	4														
T16-120	Pole Ø0.63" 46"				4					2					2	
T16-Link	Link Ø0.63"	4	4		4											
C16-Y	Corner Ø0.63" 3 axes Y shape	8	8		8											
C16-H	Handling Corner Ø0.63"						2	4		2						
C16-SB	Space Booster Ø0.63"											4	4		4	
T19-75	Pole Ø0.75" 28.6"					12					4					6
T19-100	Pole Ø0.75" 38.4"			8		8										
T19-120	Pole Ø0.75" 45.4"			8					2					4		
T19-Link	Link Ø0.75"			4		8					2					2
C19-Y	Corner Ø0.75" 3 axes Y shape			8		8										
C19-H	Handling Corner Ø0.75"								4		4					
C19-SB	Space Booster Ø0.75"													4		4

DVDK	ROOM															
DAKK	KUUM			STRUCTURE				HANDLI	NG POLES IN	CLUDED			SPACE	BOOSTER IN	CLUDED	
REF	DESIGNATION	DR150	DR240	DR300	DR240W	DR300W	DR150	DR240	DR300	DR240W	DR300W	DR150	DR240	DR300	DR240W	DR300W
T25-75	Pole Ø1.00" 28"	16		40		26	6		20		10	8		24		16
T25-100	Pole Ø1.00" 38"	4	18	9	12	6										
T25-120	Pole Ø1.00" 45"	4	20	9	13	6		9		5			12		8	
T25-Link	Link Ø1.00"	12	9	29	6	19	3		10		5	4		12		8
C25-Y	Corner Ø1.00" 3 axes Y shape	8	8	8	8	8										
C25-K	Corner Ø1.00" 4 axes K shape		4	4	2	2										
C25-T	Corner Ø1.00" 3 axes T shape		4	4	2	2										
C25-XI	Corner Ø1.00" 5 axes XI shape		1	1												
C25-H	Handling Corner Ø1.00"						6	18	20	10	10					
C25-SB	Space Booster Ø1.00"											8	24	24	16	16
C25-RF	Rubber Feet Ø1.00"		1	1												

DVBK	PROPAGATOR						
אווואע	I IVOI AUATOIV		STRUCTURE		H	ANDLING POL	ES
REF	DESIGNATION	DP60	DP90	DP120	DP60	DP90	DP120
T16-40	Pole Ø0.63" 14"	4	4	20			
T16-60	Pole Ø0.63" 22"	8	8	6	1	2	
T16-90	Pole Ø0.63" 34"		6				
T16-120	Pole Ø0.63" 46"			12			1
C16-Y	Corner Ø0.63" 3 axes Y shape	8	8	8			
C16-K	Corner Ø0.63" 4 axes K shape			4			
C16-T	Corner Ø0.63" 3 axes T shape		4	12			
C16-H	Handling Corner Ø0.63"				2	2	2
GRID6040	GRID 24" x 16"	-	Option	12			

LODGI	□							
LUDUI	<u> </u>	STRU	CTURE	HANDLING	POLES INC.	SPACE BOOSTER INC.		
REF	DESIGNATION	L100	L160	L100	L160	L100	L160	
T16-40	Pole Ø0.63" 14"	5	5					
T16-60	Pole Ø0.63" 22"	22		3		4		
T16-100	Pole Ø0.63" 38"	8	16					
T16-120	Pole Ø0.63" 46"		14		3		4	
T16-Link	Link Ø0.63"	4						
C16-Y	Corner Ø0.63" 3 axes Y shape	16	16					
C16-K	Corner Ø0.63" 4 axes K shape	2	2					
C16-T	Corner Ø0.63" 3 axes T shape	2	2					
C16-H	Handling Corner Ø0.63"			6	6			
C16-SB	Space Booster Ø0.63"					4	4	
GRID6040	GRID 24" x 16"	1	2					

INTEN	ICE						
INIEN	ISE	STRU	CTURE	HANDLING	POLES INC.	SPACE BO	OSTER INC.
REF	DESIGNATION	INT480	INT600	INT480	INT600	INT480	INT600
T25-60	Pole Ø1.00" 24"	8	8				
T25-75	Pole Ø1.00" 28"		80		20		48
T25-120	Pole Ø1.00" 45"	80	40	10		24	
T25-Link	Link Ø1.00"	20	60		10		24
C25-Y	Corner Ø1.00" 3 axes Y shape	8	8				
C25-K	Corner Ø1.00" 4 axes K shape	12	12				
C25-T	Corner Ø1.00" 3 axes T shape	10	10				
C25-XI	Corner Ø1.00" 5 axes XI shape	6	6				
C25-H	Handling Corner Ø1.00"			20	20		
C25-SB	Space Booster Ø1.00"					48	48
C25-RF	Rubber Feet Ø1.00"	6	6				

מחעם	O SHOOT (SMALL)								
אעוח	O SUUUI (SMALL)		STRU	CTURE		H/	ANDLING PO	LES INCLUI	DED
REF	DESIGNATION	HS40	HS60	HS80	HS100	HS40	HS60	HS80	HS100
T16-40	Pole Ø0.63" 14"	8				2			
T16-60	Pole Ø0.63" 22"	8	8				2		
T16-80	Pole Ø0.63" 30"		8	8				2	
T16-90	Pole Ø0.63" 34"			8					
T16-100	Pole Ø0.63" 38"				16				2
T16-Link	Link Ø0.63"	4	4	4	4				
C16-Y	Corner Ø0.63" 3 axes Y shape	8	8	8	8				
C16-H	Handling Corner Ø0.63"					4	4	4	4

ITUK	O SHOOT (LARGE)				STRU	CTURE						HA	NDLING PO	LES INCLUD	ED		
REF	DESIGNATION	HS120	HS150	HS240	HS300	HS240W	HS300W	HS480W	HS600W	HS120	HS150	HS240	HS300	HS240W	HS300W	HS480W	HS600W
T19-75	Pole Ø0.75" 28.6"		16		40		26		72		4		10		6		20
T19-100	Pole Ø0.75" 38.4"	8	8	18	18	12	12	30	30								
T19-120	Pole Ø0.75" 45.4"	8		20		13		36		2		5		3		10	
T19-Link	Link Ø0.75"	4	12	9	29	6	19	15	51		2		5		3		10
C19-Y	Corner Ø0.75" 3 axes Y shape	8	8	8	8	8	8	8	8								
C19-K	Corner Ø0.75" 4 axes K shape			8	8	4	4	16	16								
C19-XI	Corner Ø0.75" 5 axes XI shape			1	1			4	4								
C19-H	Handling Corner Ø0.75"									4	4	10	10	6	6	20	20
C19-RF	Rubber Feet Ø0.75"			1	1			2	2								

SUPPORTS & REINFORCEMENT

CARRYIT

BALLAST SUPPORT 5"x 14" 22 lb








BALLAST MAX

Dimensions: 4½"x 14"
Weight: 22 lb



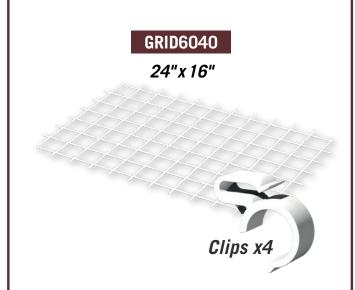





STRAPIT45

2x StrapIT Ø2"/66 lb each





TENT REPAIR KITS

PATCHIT7

Ø4"
PatchIT Mylar/Fabric (CF7D)

PATCHIT16

Ø10" PatchIT Mylar/Fabric (DF16) PATCHIT25

Ø14" PatchIT Mylar/Fabric (DF25)





SPARE PARTS: 36 parts for all SJ & HS tents

