



secret jardin

The Original **60**

INSTRUCTIONS

GR60



info@secretjardin.com



[Secretjardin_](https://www.instagram.com/Secretjardin_)



[Secret Jardin Official](https://www.youtube.com/SecretJardinOfficial)



[Secret Jardin](https://www.facebook.com/SecretJardin)



[secretjardin.com](https://www.secretjardin.com)

EN For instructions in other languages, please visit our website using the QR Code below.

FR Pour obtenir des instructions dans d'autres langues, veuillez visiter notre site Web à l'aide du code QR ci-dessous.

NL Voor instructies in andere talen kunt u onze website bezoeken met behulp van de onderstaande QR-code.

DE Für Anweisungen in anderen Sprachen besuchen Sie bitte unsere Website mit dem untenstehenden QR-Code.

ES Para obtener instrucciones en otros idiomas, visite nuestro sitio web utilizando el código QR a continuación.

IT Per istruzioni in altre lingue, visita il nostro sito web utilizzando il codice QR riportato di seguito.



SUMMARY

INTRODUCTION	4
WARNING AND SAFETY INSTRUCTIONS	5
PRODUCT CONTENTS	6
ASSEMBLY INSTRUCTIONS	7
INSTRUCTIONS FOR REVERSE ASSEMBLY	7
STRUCTURE	8
FABRIC	9
DUCTING FLANGE	10
LIGHT BAFFLE	10
CABLE FLANGE	10
TIMER & EXTRACTOR	11
WIRING	12
FANS	15
GRIDS	17
LIGHTING	18
HEATING MAT (OPTION)	20
FILTER (OPTION)	21
FIX TO WALL	21
HOW TO USE	22
USING THE TIMER	22
USING THE EXTRACTOR	22
MAINTENANCE	23
FILTER (OPTION)	23
CLEANING	23
PRODUCT SPECIFICATIONS	24
WARRANTY	25

INTRODUCTION

DEAR VALUED CULTIVATOR,

Thank you for purchasing our cutting-edge indoor cultivation kit.

We are truly grateful for your choice in selecting the first complete grow kit featuring all equipment operating at 24V, ensuring both safety and energy efficiency.

In this instruction booklet, you'll find a comprehensive assembly and usage guide.

We appreciate your trust in our product, and we are excited to embark on this cultivation journey with you.

Happy growing!



Video presentation




PLEASE READ CAREFULLY BEFORE USE


- Make sure that all electrical products used with the tent are properly secured, so that they cannot fall out if the tent is shaken.
- Make sure to keep 20 cm of free space on sides (in addition to extractor's volume) and 5 cm free space on the back to ensure proper ventilation around the tent.
- Make sure that all products used with this tent comply with the standards in force in your country. If you find that the product is damaged, do not use it.
- Do not leave your tent unsupervised in the presence of young children.
- This product is designed for indoor use only. Do not use it outside.
- Compare the connection data on the data plate of the power supply unit (mains voltage and frequency) with that of the mains electricity supply. This data must match.
- When watering, pay attention not to splash a lot of water on electrical equipment.

PRODUCT CONTENTS


TENT FABRIC

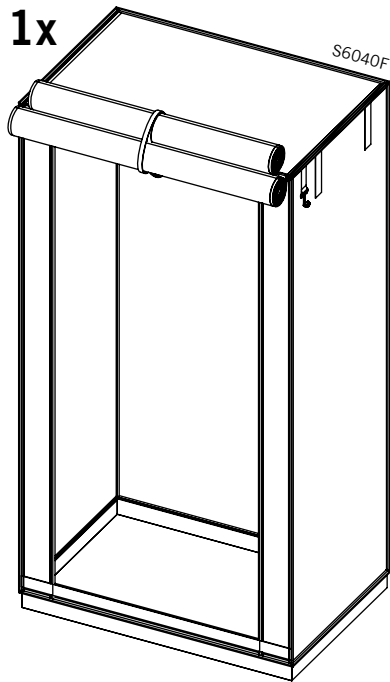


TENT STRUCTURE

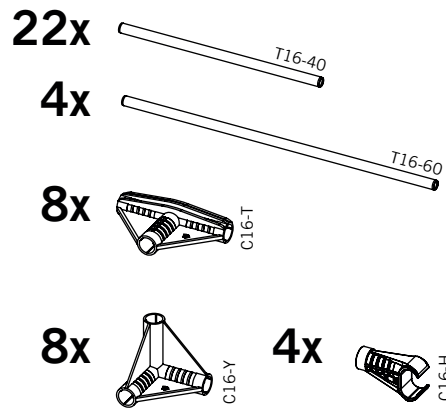


EXTRACTOR




TIMER




FANS




CABLE FLANGE

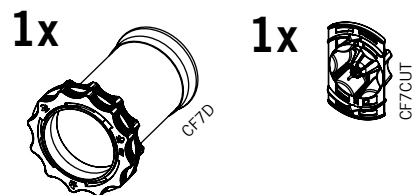


WIRING

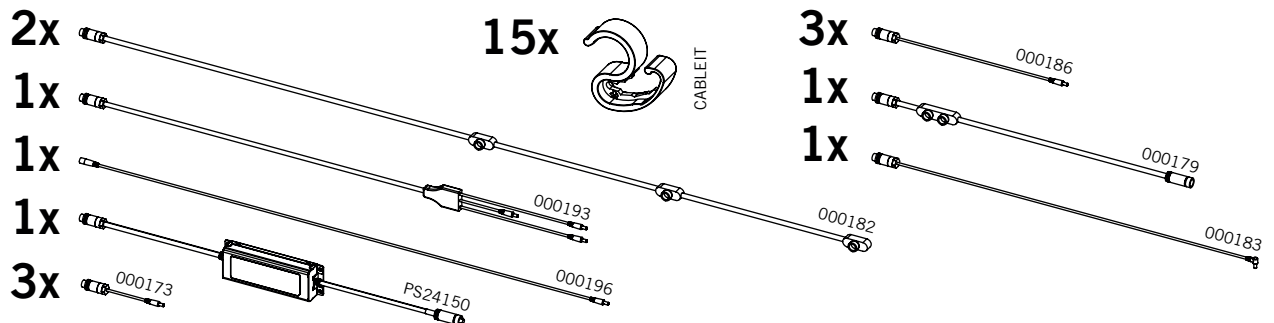


DUCTING FLANGES & LIGHT BAFFLE

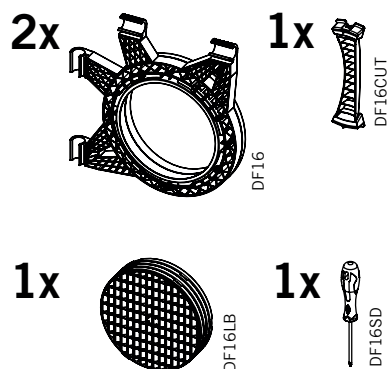

LIGHTING

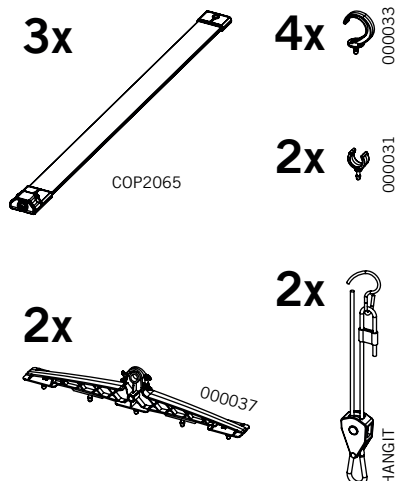

GRIDS

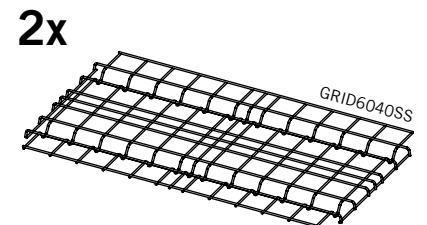


ASSEMBLY INSTRUCTIONS


INSTRUCTIONS FOR REVERSE ASSEMBLY

The following instructions detail normal assembly.

The tent can be assembled in reverse as shown below. If you wish to follow reverse assembly, be sure to invert placement of Ducting Flanges and Cable Flange in the next steps, as these require cutting openings in the fabric. Once placed, these can no longer be repositioned.

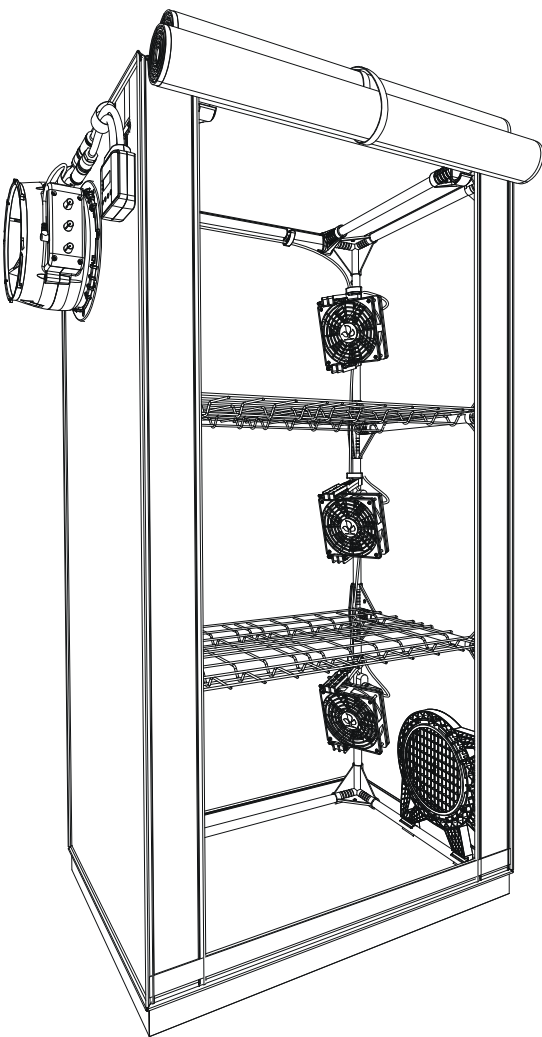






NORMAL ASSEMBLY
Extractor on LEFT side

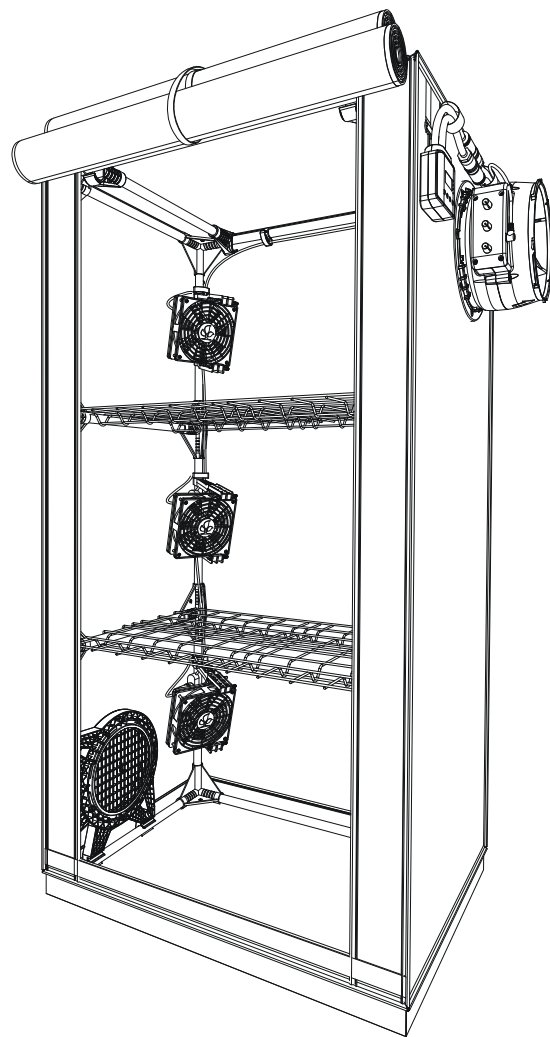

REVERSE ASSEMBLY
Extractor on RIGHT side

ASSEMBLY INSTRUCTIONS


1 STRUCTURE

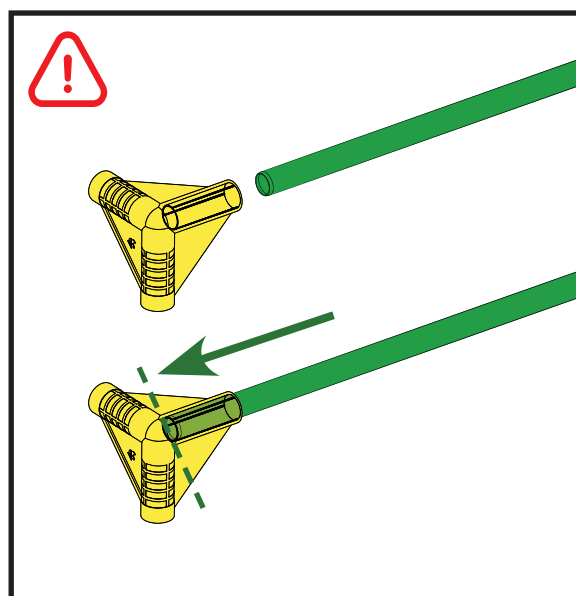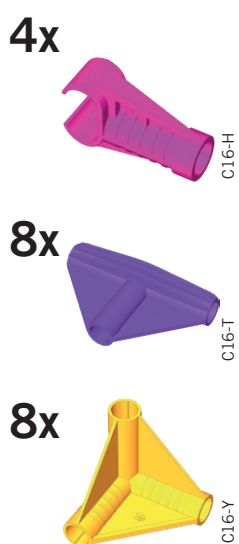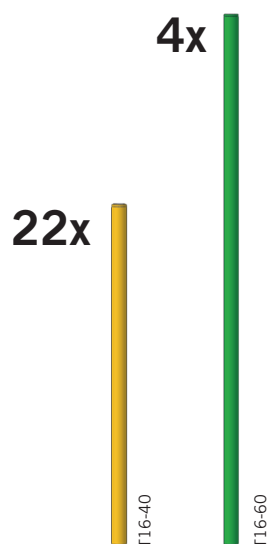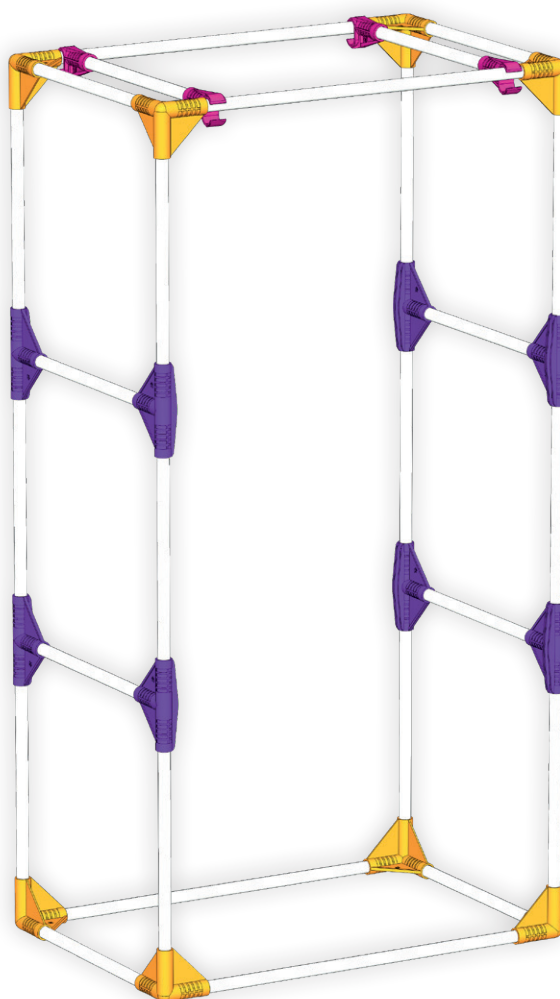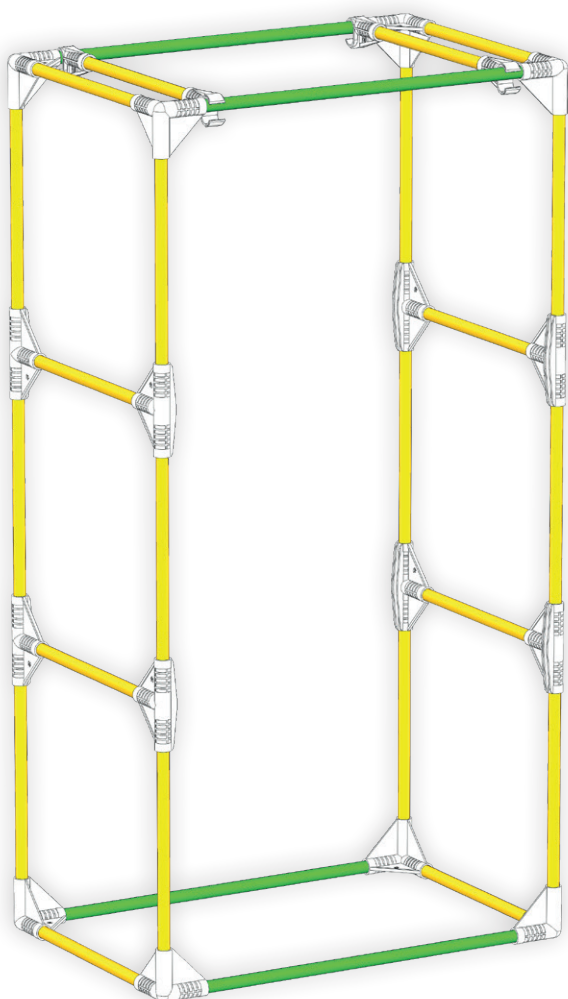


ASSEMBLY INSTRUCTIONS

2 FABRIC


2.1

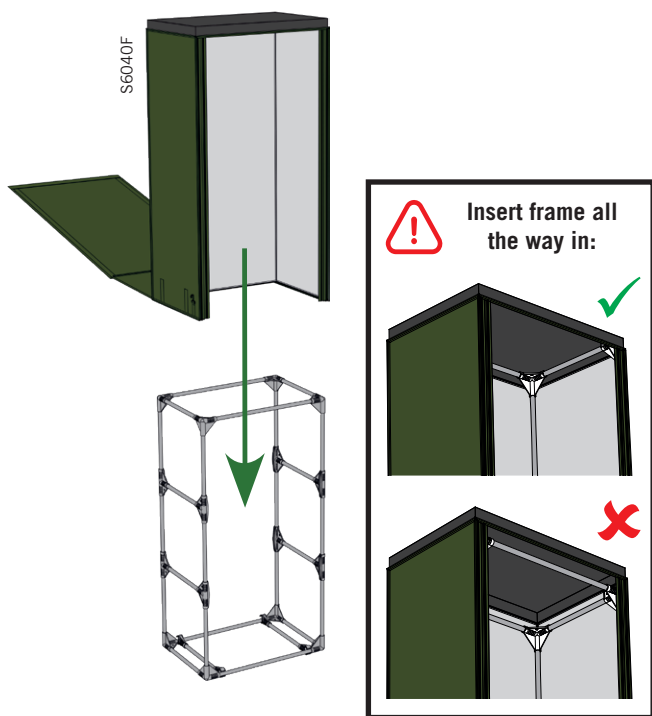


2.2

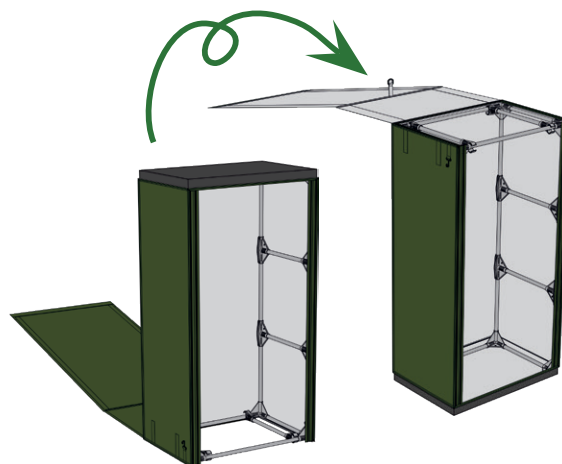

2.3

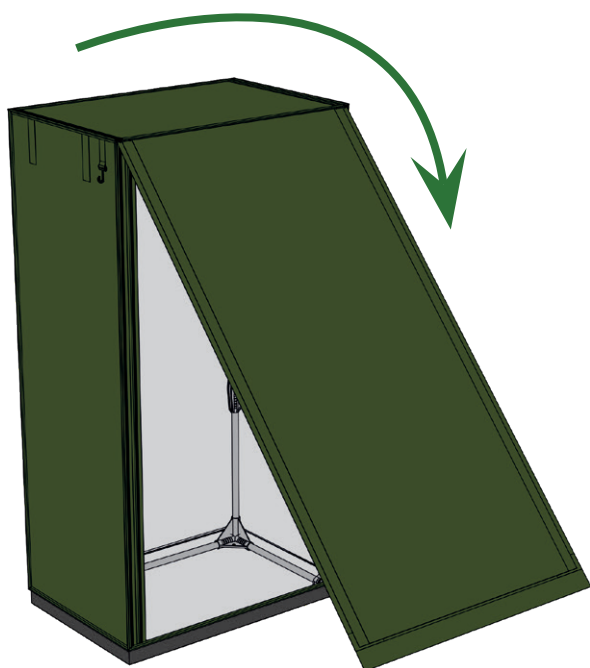


2.4

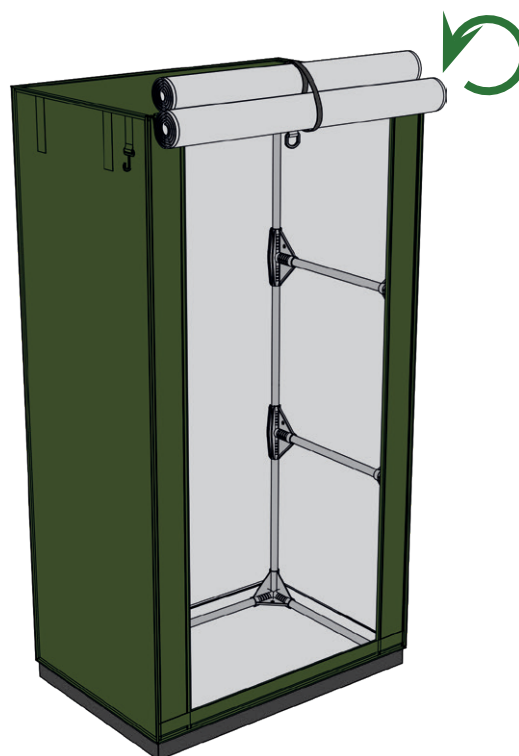

ASSEMBLY INSTRUCTIONS


3 DUCTING FLANGE

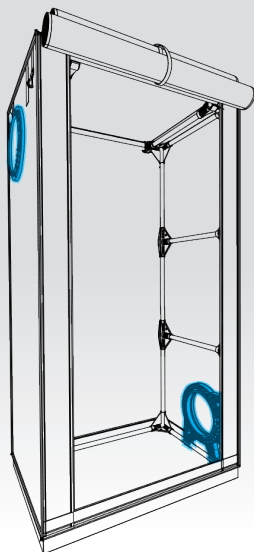


2x



DF16

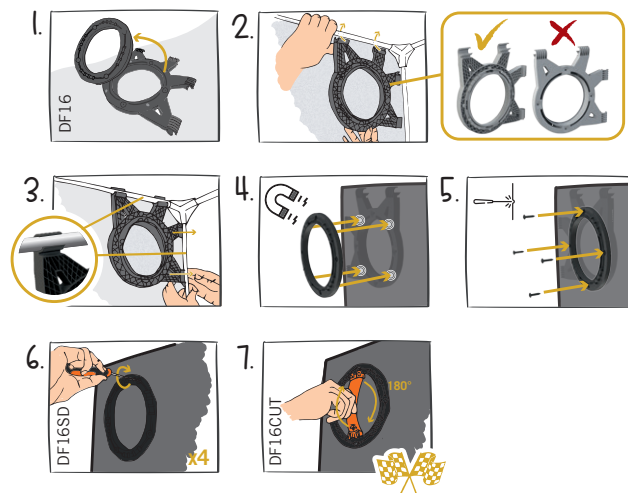


4 LIGHT BAFFLE

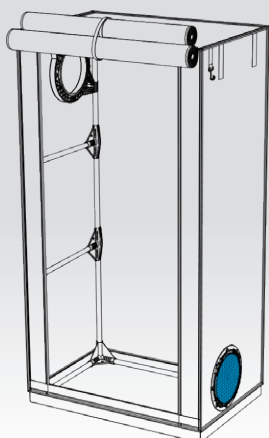


1x



DF16LB

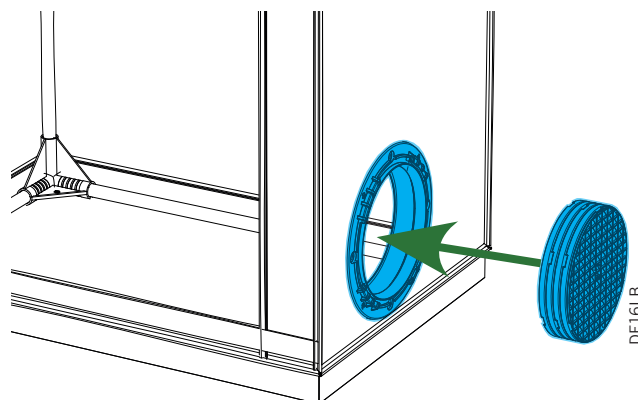



5 CABLE FLANGE

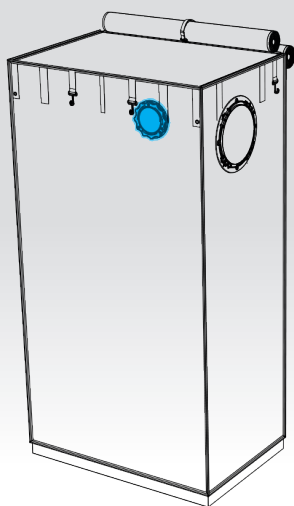

1x




CF7D

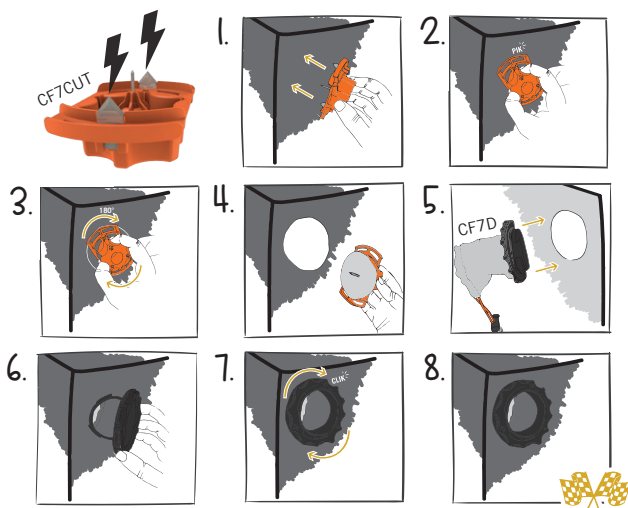


ASSEMBLY INSTRUCTIONS

6 TIMER & EXTRACTOR

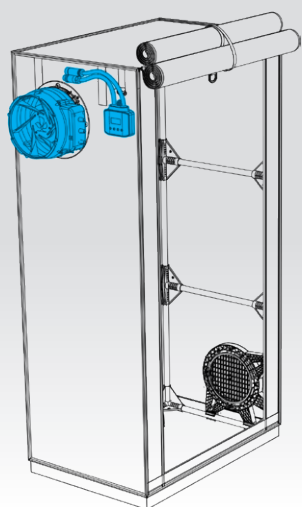


6.1

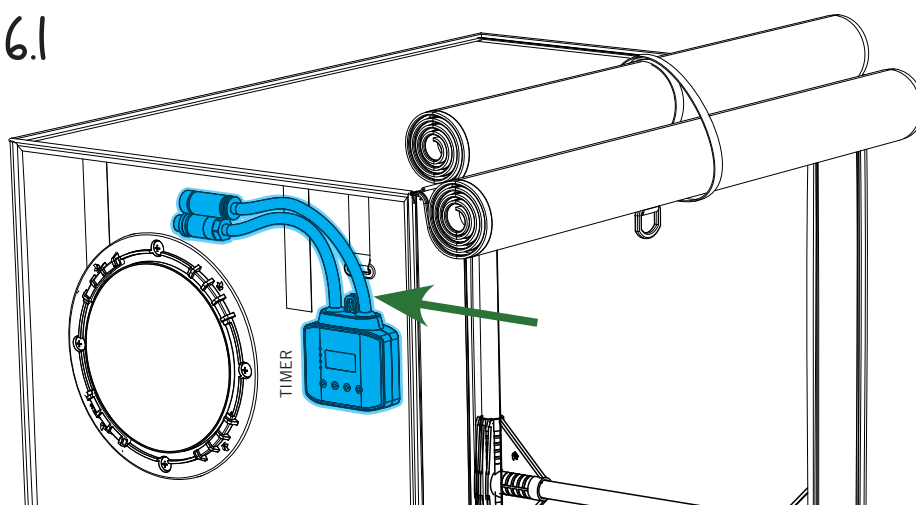



TIMER

6.2

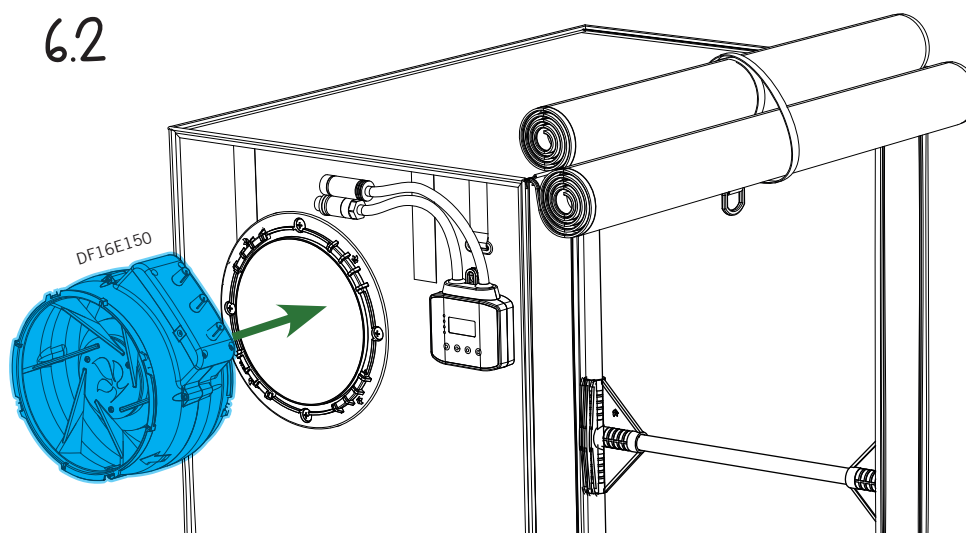


DF16E150

6.3

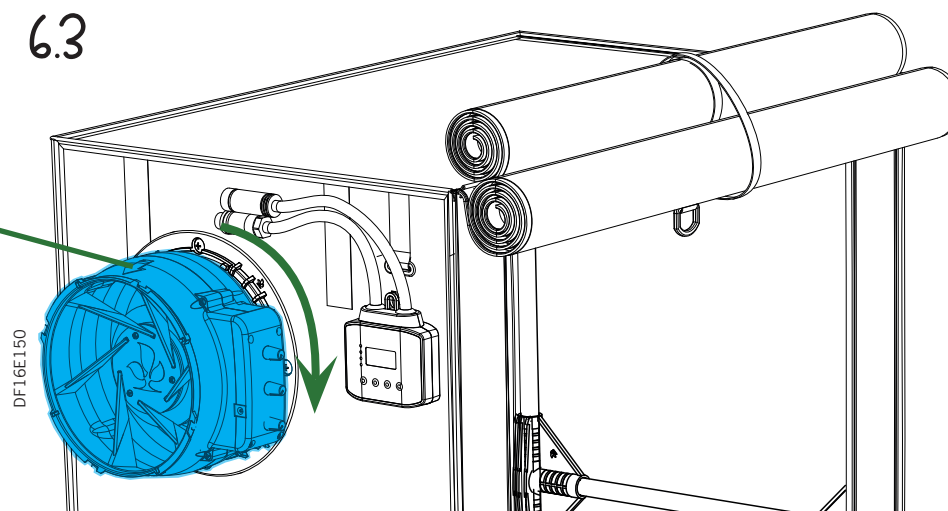


ASSEMBLY INSTRUCTIONS


7 WIRING

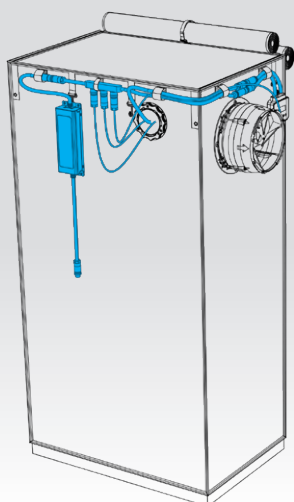


7.1

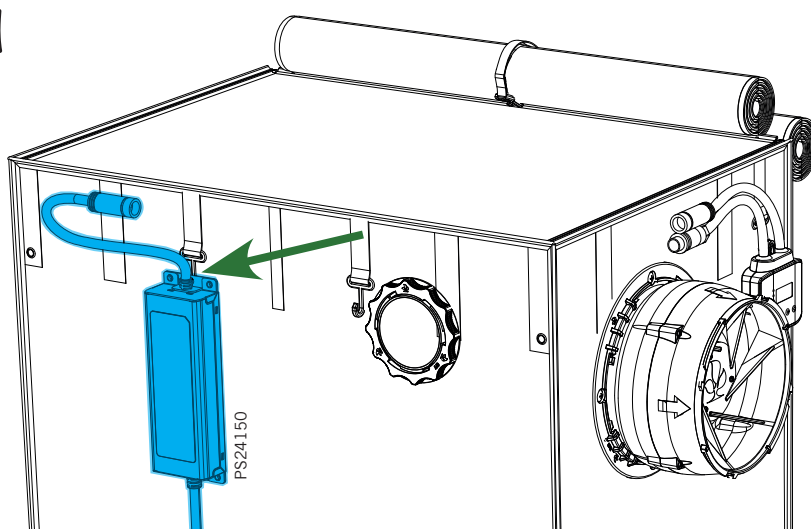

7.2

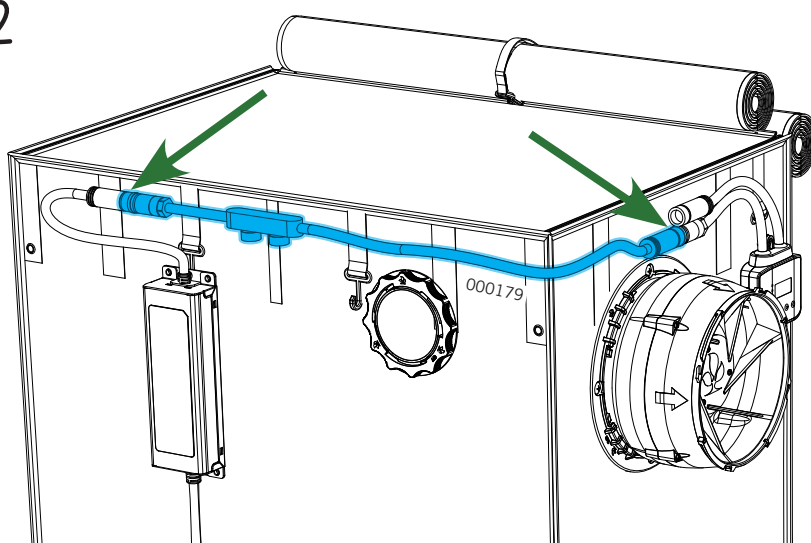



7.3

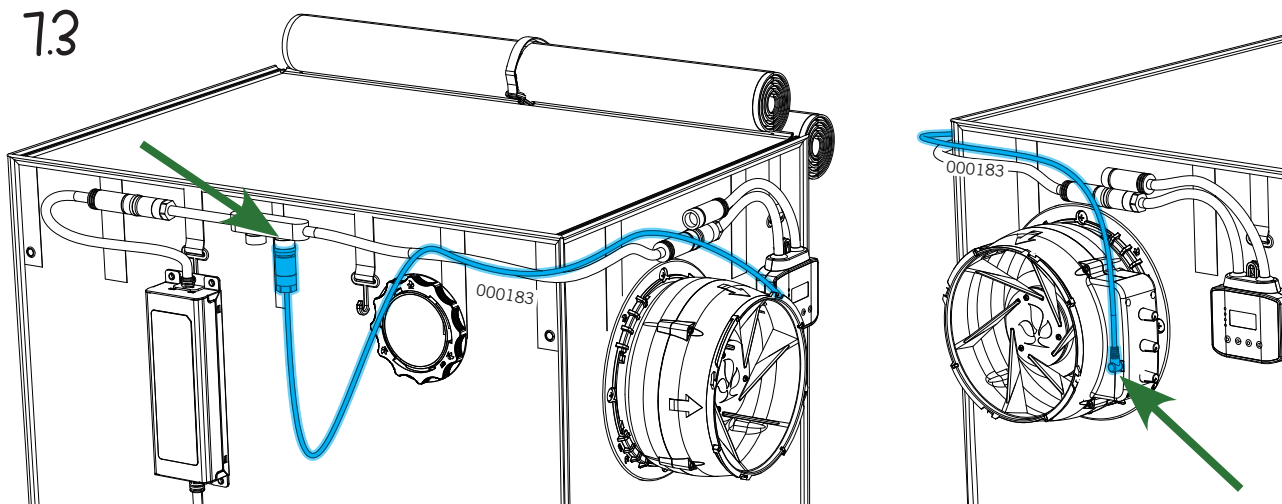



ASSEMBLY INSTRUCTIONS

7 WIRING (CONT.)

7.4

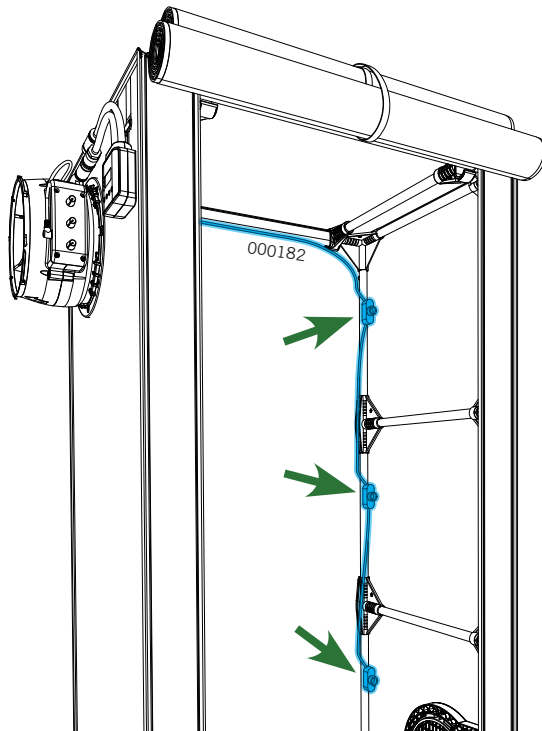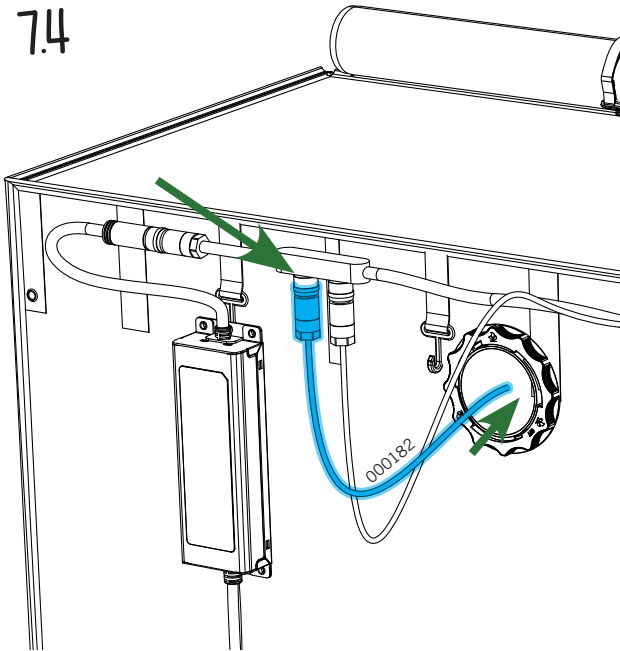


7.5

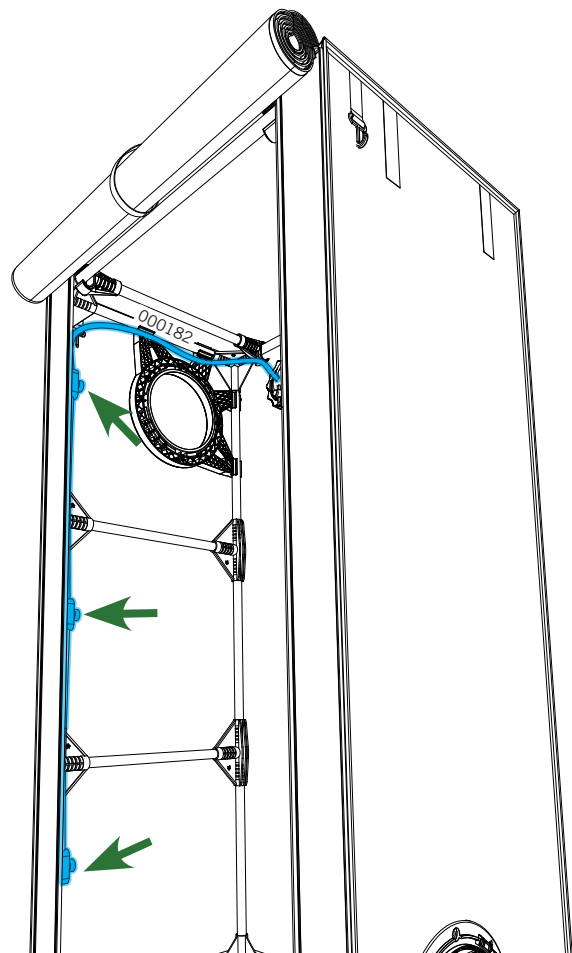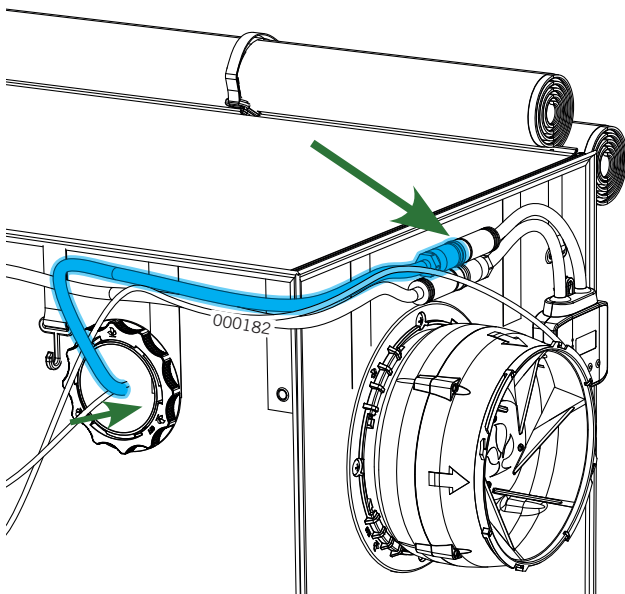



ASSEMBLY INSTRUCTIONS

7 WIRING (CONT.)

7.6

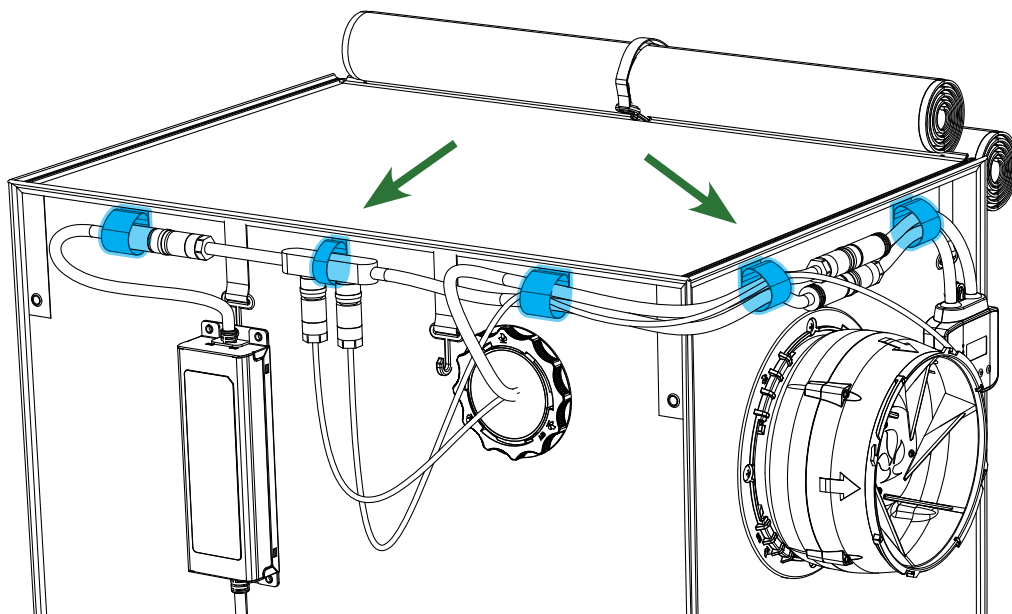




7.7

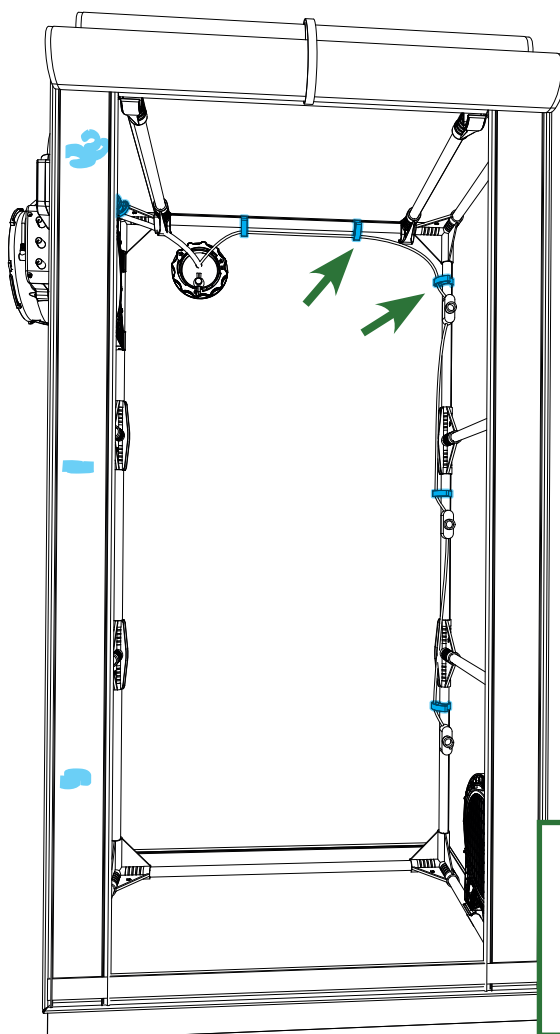

ASSEMBLY INSTRUCTIONS



8 FANS

2 LEVELS SETUP

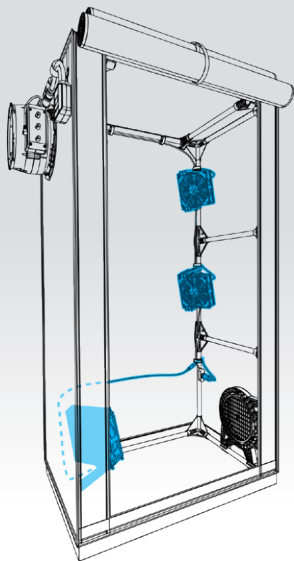



3. Option 15°

Option -15°







4. Bottom: Opposite

Air Circulation




5. Cable position

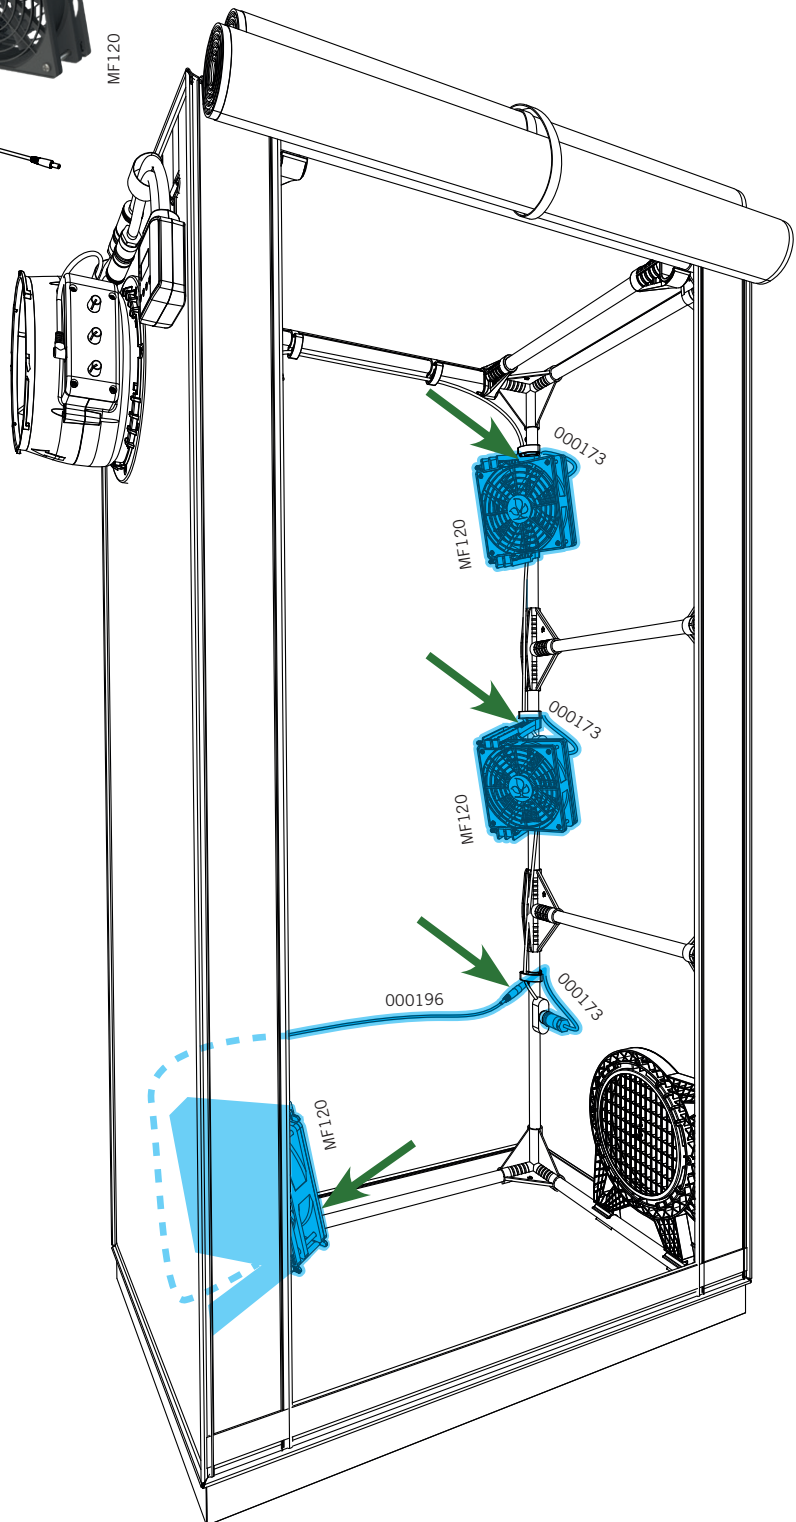

ASSEMBLY INSTRUCTIONS

8 FANS (CONT.)

3 LEVELS SETUP

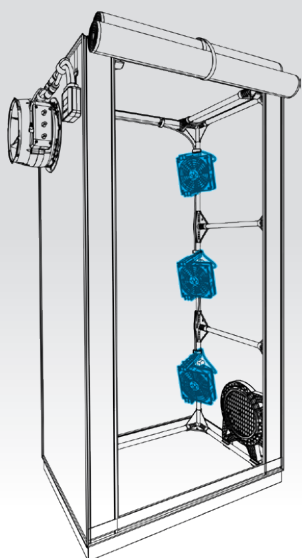

3x





MF120


3x






000173





3. Option 15°



Option -15°





6. Cable position

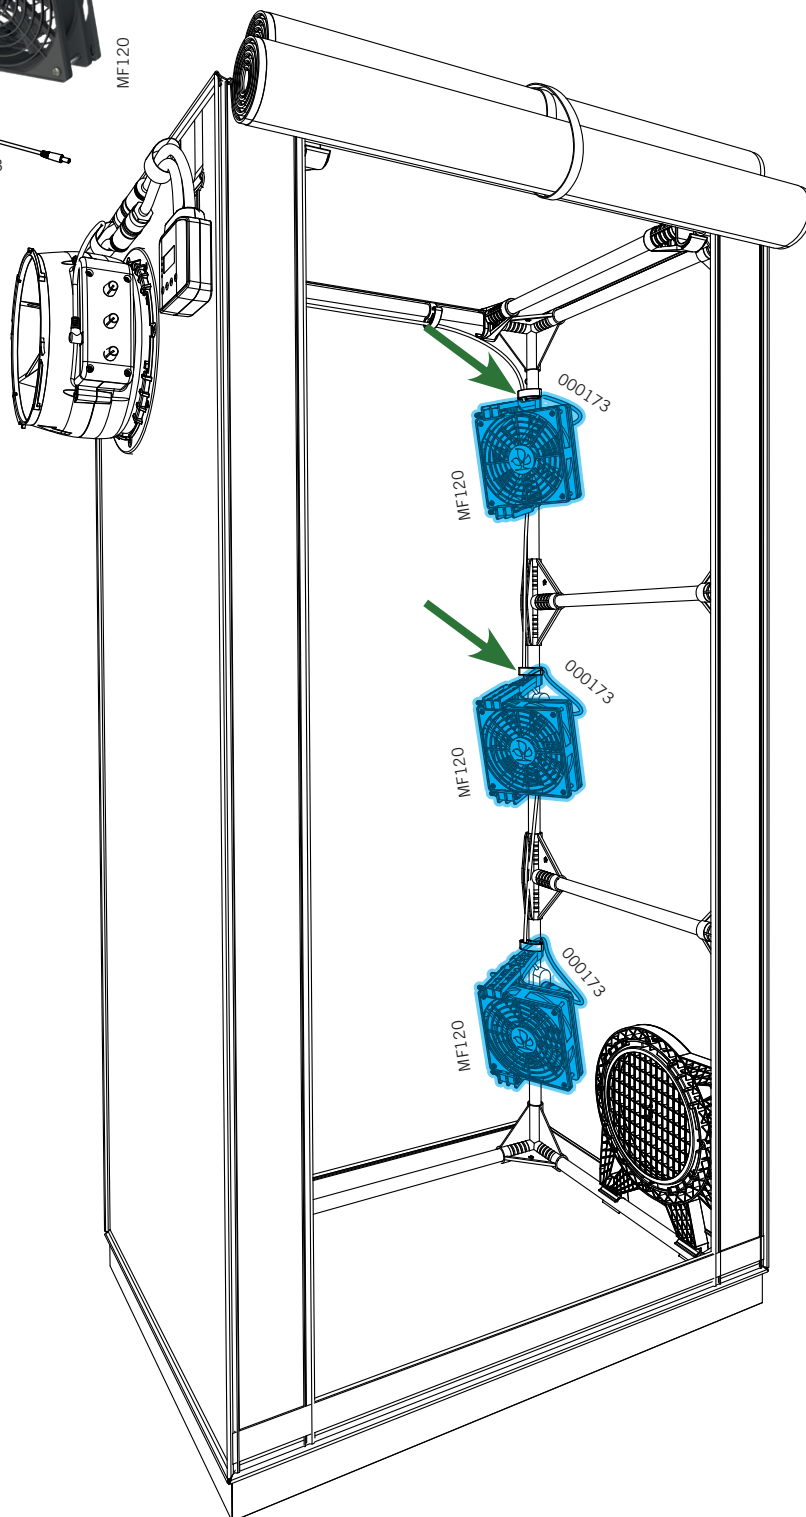



ASSEMBLY INSTRUCTIONS

8 GRIDS

2 LEVELS SETUP

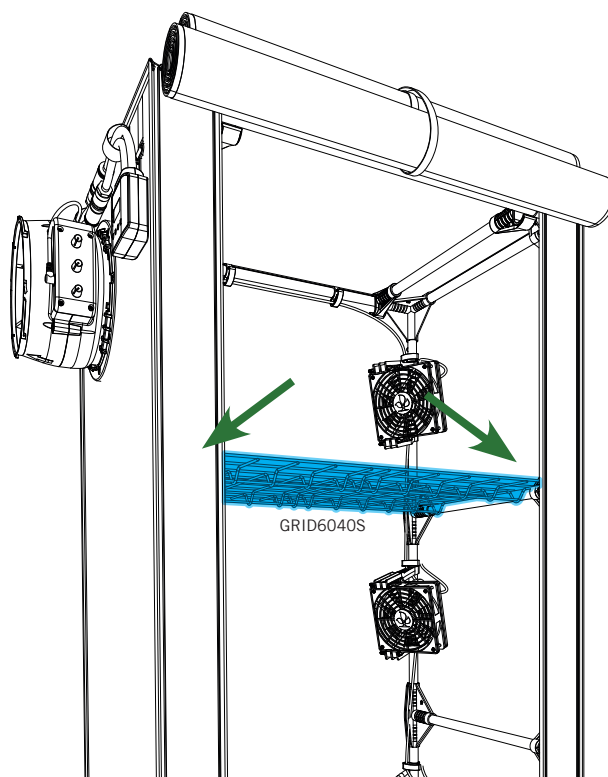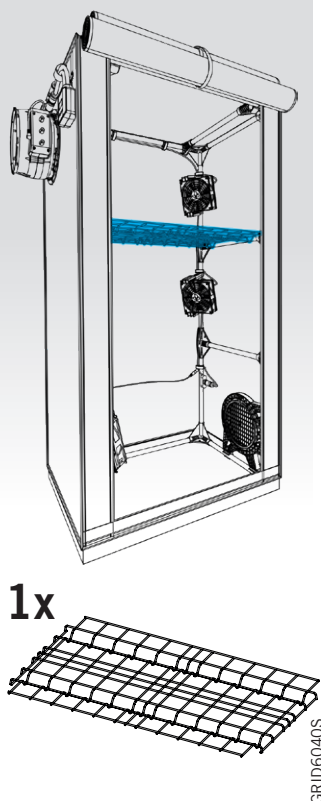







3 LEVELS SETUP

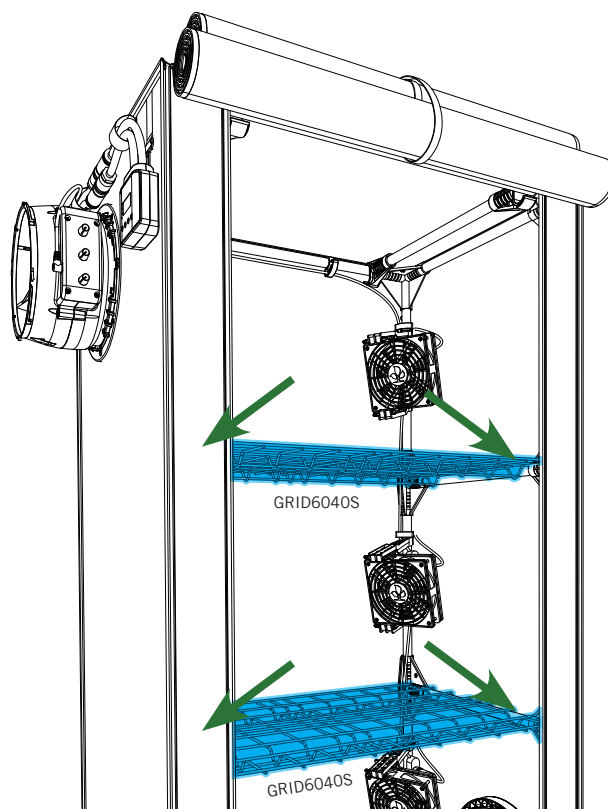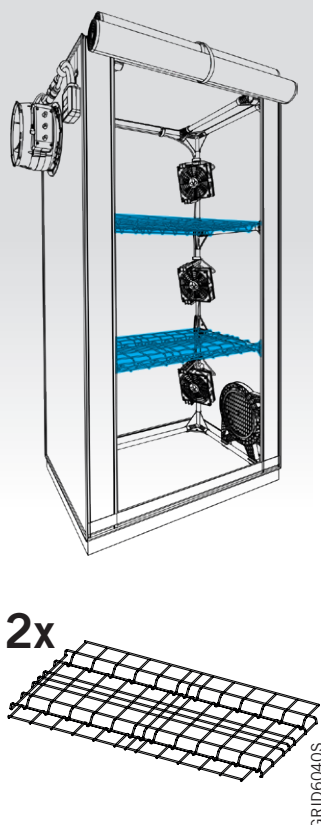

ASSEMBLY INSTRUCTIONS

10 LIGHTING



2 LEVELS SETUP

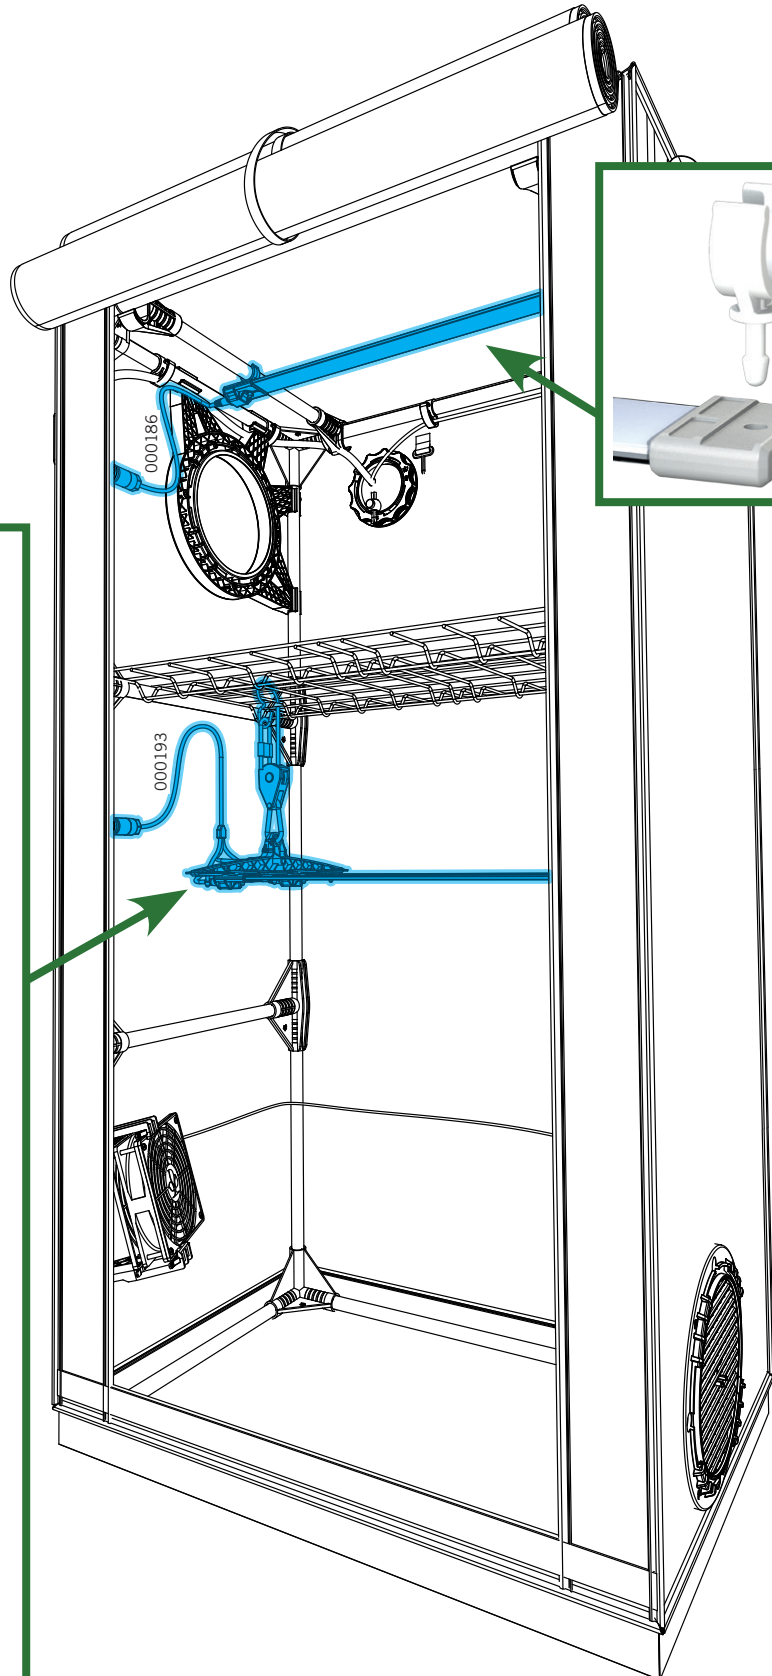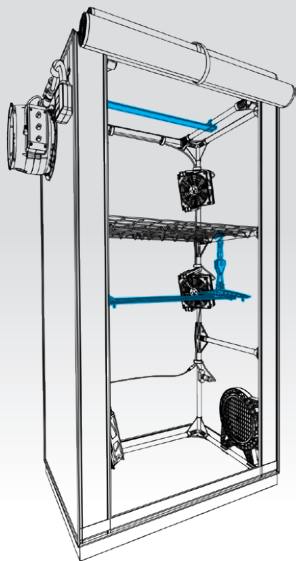

ASSEMBLY INSTRUCTIONS

10 LIGHTING (CONT.)


3 LEVELS SETUP

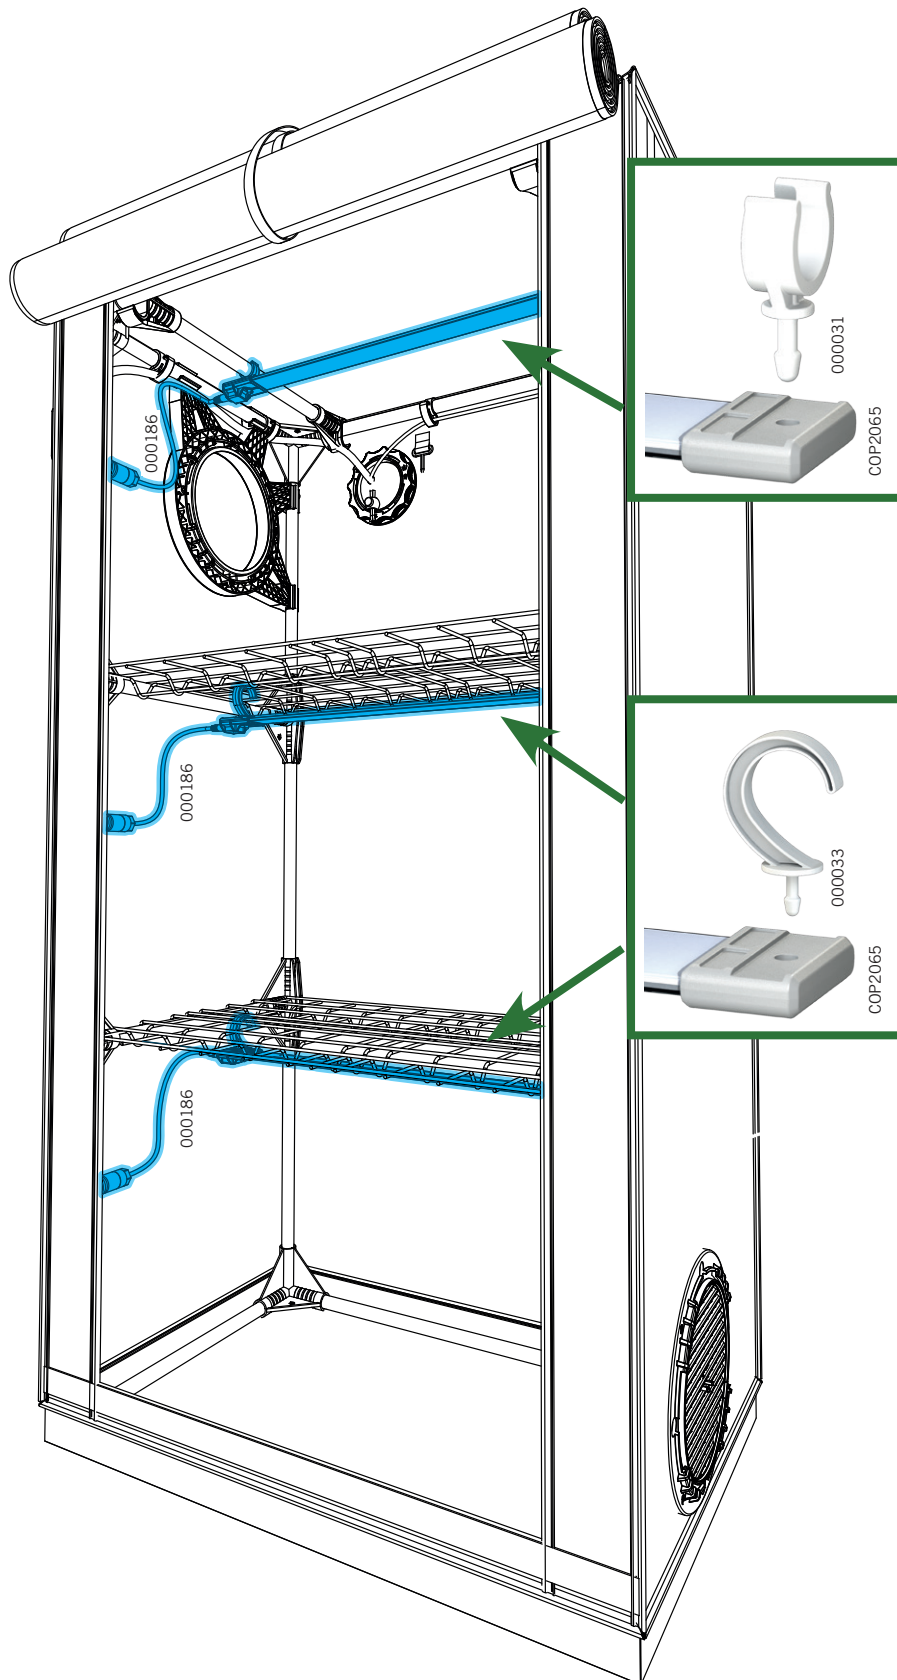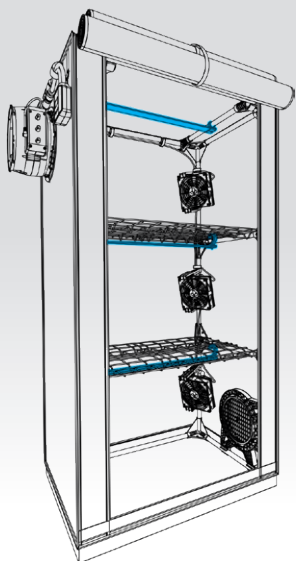


ASSEMBLY INSTRUCTIONS

11 HEATING MAT (OPTION)


2 LEVELS SETUP

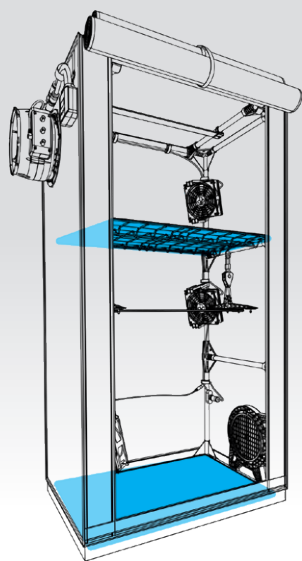


2x

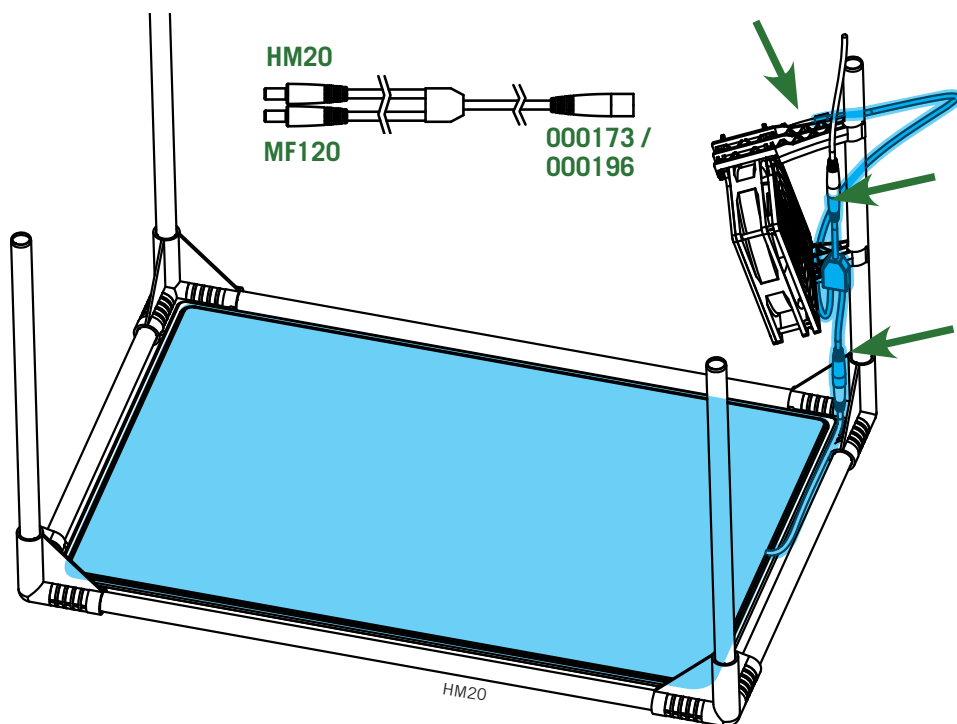

3 LEVELS SETUP


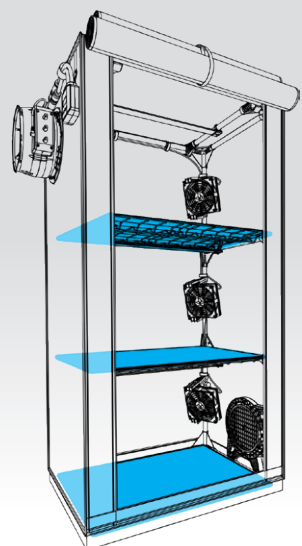


3x


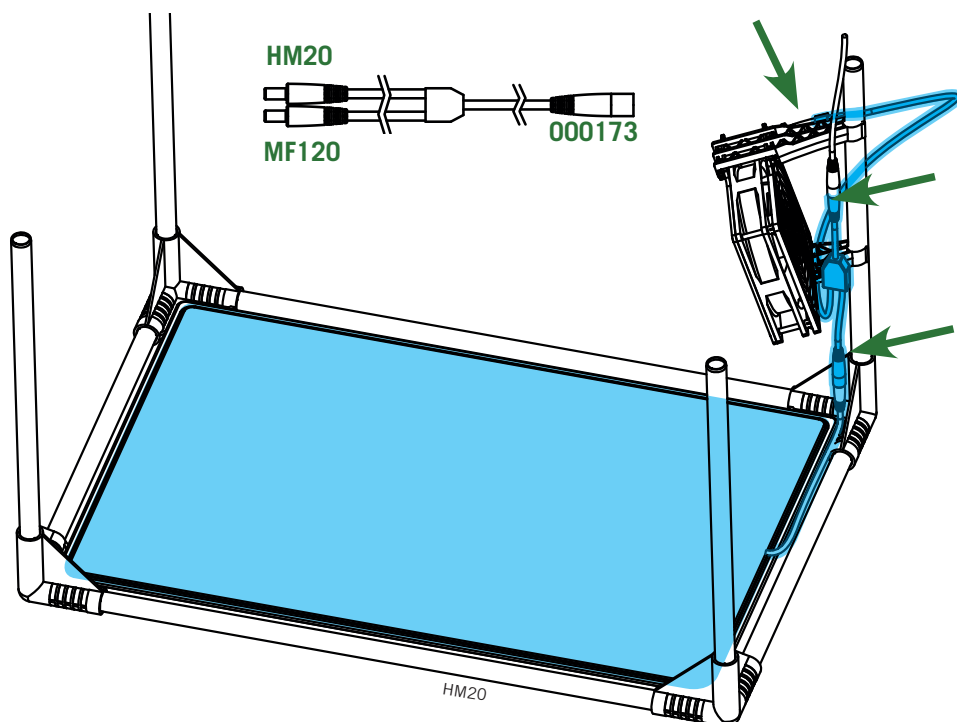


ASSEMBLY INSTRUCTIONS

12 FILTER (OPTION)

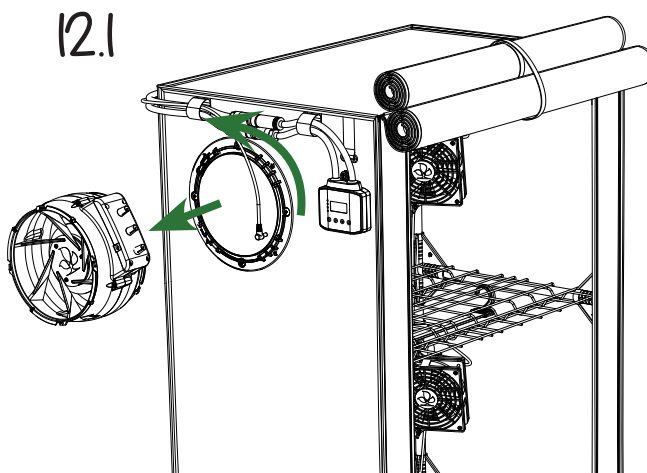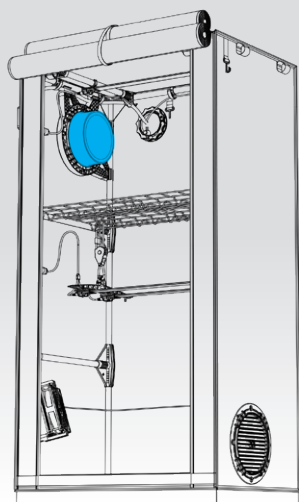


12.2

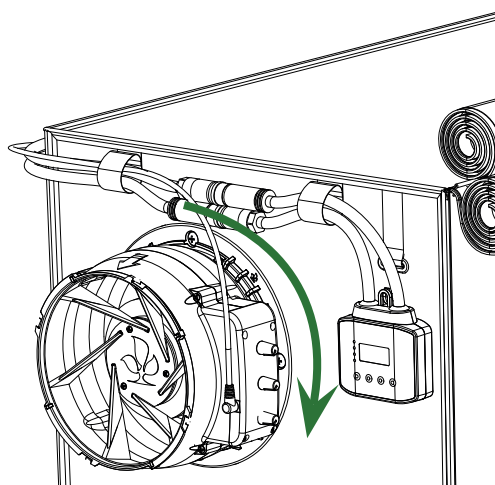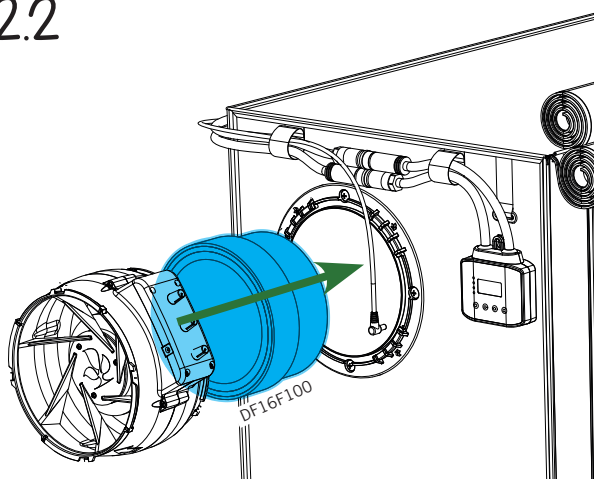

13 FIX TO WALL (OPTIONAL)

We recommend you attach
Use appropriate screws
and plugs according to wall
materials.

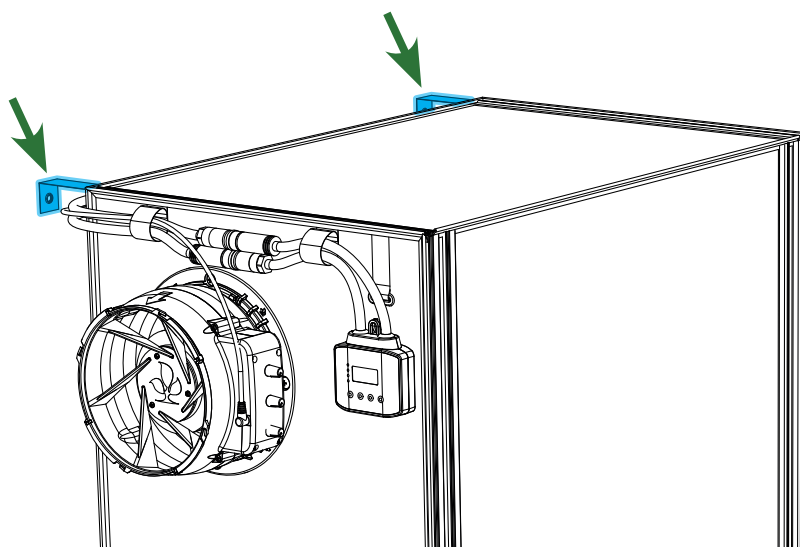

HOW TO USE

USING THE TIMER

The timer enables you to schedule your lights on a 24-hour cycle, with precise start times and durations (using the «START» and «DURATION» settings), and it also features dimming capabilities, allowing you to adjust brightness from 0% to 100%.



RECOMMENDED VALUES FOR SHORT DAY PLANTS WITH LOW LIGHT REQUIREMENT

Stage	Seedling / cutting	Growing	Flowering
DURATION	18h	18h	12h
DIMMING	40 %	70 %	100 %

RECOMMENDED VALUES FOR SHORT DAY PLANTS WITH HIGH LIGHT REQUIREMENT

Stage	Seedling / cutting	Growing
DURATION	18h	18h
DIMMING	70 %	100 %

USING THE EXTRACTOR

The extractor enables you to control temperature inside your grow room. It offers three key parameters: «TEMP°» to set your desired temperature, «EXT. MIN» to establish the minimum extraction rate, and «EXT. MAX» to specify the maximum extraction rate.

RECOMMENDED SETTINGS

Stage	Seedling / cutting	Growing	Flowering
TEMP°	28 °C	24 °C	25 °C
EXT. MIN	0 %	20 %	40 %
EXT. MAX	100 m ³ /h	100 m ³ /h	100 m ³ /h



MAINTENANCE

FILTER (OPTION)


When using the optional filter, we advise you to replace it every 6 months.
See instructions on page 21 for details on how to install or replace the filter.

CLEANING

Inside mylar can be cleaned using a damp cloth. Make sure to dry it properly with a dry cloth afterward.

PRODUCT SPECIFICATIONS

THE ORIGINAL 60

Reference	GR60																								
Designation	The Original 60																								
Weight (Net)	11.5 kg																								
Dimensions Assembled (WxDxH)	60x40x116 cm																								
CONSUMPTION																									
Max	140 W																								
Monthly																									
Light	18 h/d																								
kWh	45 kWh																								
POWER & PLUGS																									
Voltage	200-240 V																								
Frequency	50/60 Hz																								
Plug Type, Country	C/G Type, UE/UK																								
LIGHTING																									
LED Bulbs	3x COP2065																								
Power	60 W																								
PPE (Bulb)	2.70 μmol/s/W																								
PPE	2.55 μmol/s/W																								
PPFD*																									
Grow Area	60x40 cm																								
Lighting Distance	15 cm																								
40cm high level (1x COP2065)	<table><tr><td>210</td><td>245</td><td>280</td><td>280</td><td>245</td><td>210</td></tr><tr><td>245</td><td>345</td><td>400</td><td>400</td><td>345</td><td>245</td></tr><tr><td>245</td><td>345</td><td>400</td><td>400</td><td>345</td><td>245</td></tr><tr><td>210</td><td>245</td><td>280</td><td>280</td><td>245</td><td>210</td></tr></table> PPF : 51 μmol/s Average PPFD: 280 μmol/s/m²	210	245	280	280	245	210	245	345	400	400	345	245	245	345	400	400	345	245	210	245	280	280	245	210
210	245	280	280	245	210																				
245	345	400	400	345	245																				
245	345	400	400	345	245																				
210	245	280	280	245	210																				
80cm high level (2x COP2065)	<table><tr><td>360</td><td>450</td><td>515</td><td>515</td><td>450</td><td>360</td></tr><tr><td>450</td><td>670</td><td>780</td><td>780</td><td>670</td><td>450</td></tr><tr><td>450</td><td>670</td><td>780</td><td>780</td><td>670</td><td>450</td></tr><tr><td>360</td><td>450</td><td>515</td><td>515</td><td>450</td><td>360</td></tr></table> PPF : 102 μmol/s Average PPFD: 560 μmol/s/m²	360	450	515	515	450	360	450	670	780	780	670	450	450	670	780	780	670	450	360	450	515	515	450	360
360	450	515	515	450	360																				
450	670	780	780	670	450																				
450	670	780	780	670	450																				
360	450	515	515	450	360																				
Spectrum	 Spring: Grow Spectrum																								
VENTILATION																									
2 min cycle (filter on)																									
Extractor (included)	150 m³/h																								
Filter (option)	100 m³/h																								
Fan (included)	3x MF120																								
HEAT MAT																									
Included	—																								
Option	1x / 2x / 3x 20 W																								
OTHER																									
Max weight per grid	5 kg																								
Life Time	50 000 h																								

* Measured on white board

WARRANTY

Secret Jardin guarantees that all of its products are free from defects in materials and workmanship for a period of 2 years from the original purchase date (6 months for consumables products). During this period, Secret Jardin will repair or replace, at its discretion, any defective product at no cost to the original owner.

This warranty does not cover damages caused by misuse, accident, negligence, unauthorized modification, improper installation, or any other cause beyond the control of Secret Jardin.

Secret Jardin's liability under this warranty is limited to the cost of repairing or replacing the defective product. This warranty excludes any liability for indirect, incidental, or consequential damages.

To qualify for this warranty, we invite you to fill the form you can find on our website at [**www.secretjardin.com**](http://www.secretjardin.com)

