


Instructions



250W

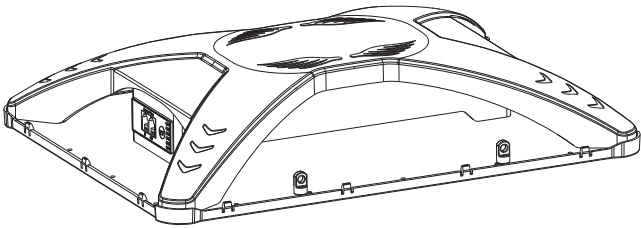




Physical Dimensions(Unit: mm/inch)

Product Specifications	250W
Input Voltage	100-240 V AC
Power Frequency	50-60 Hz
Outlook Dimensions	405 x 305 x 77 mm (15.95"x12.01"x3.03")
Net Weight	1.97kg(4.33Lbs)
Working Temperature	0°C to +40°C(32°F to +104°F)
Storing Temperature	-40°C to +70°C(-40°F to +158°F)

* The tolerance for weight is ±6%


Accessories

	1 x 2.5m Input Cable
	2 x Ratchet Hanger Ropes
	2 x V type Hanging Ropes

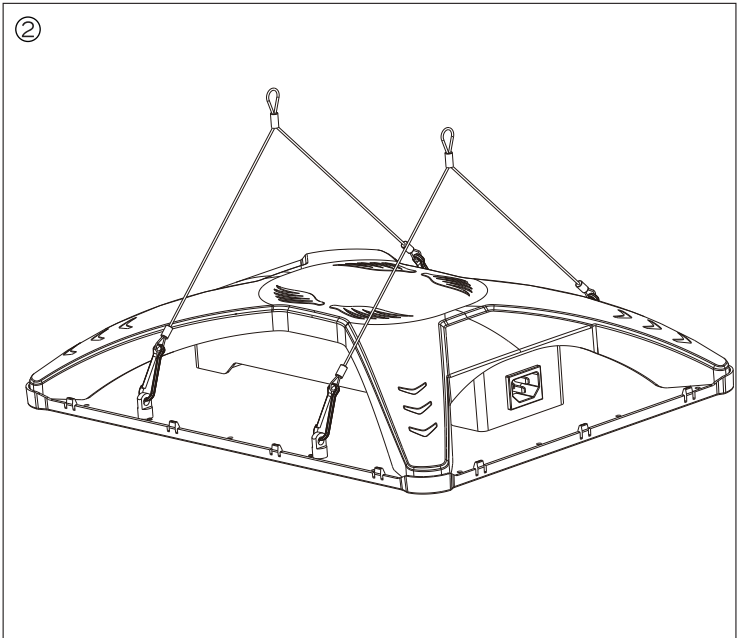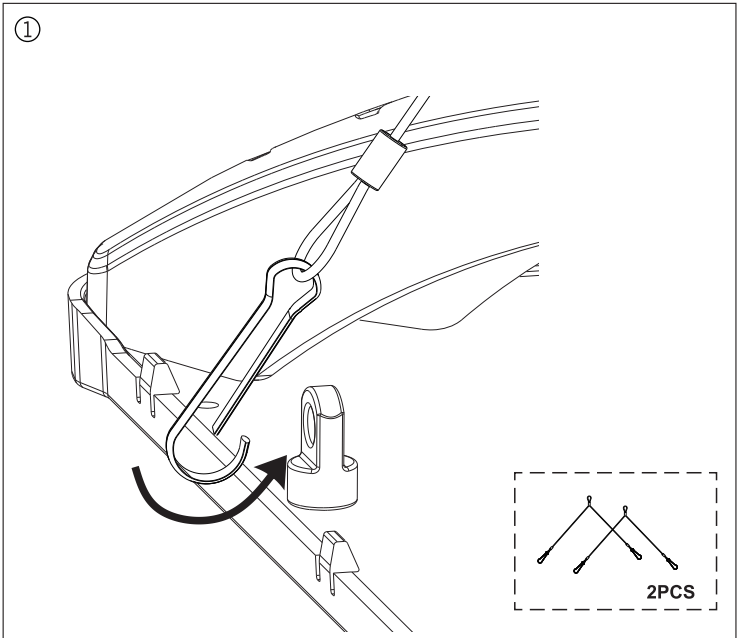


Instructions


③

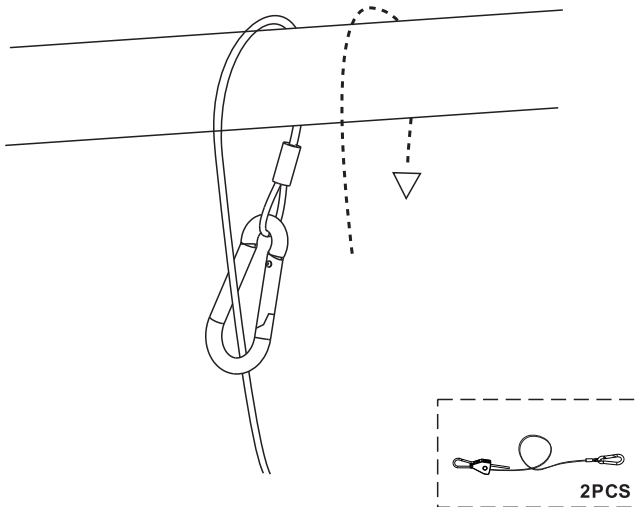


④

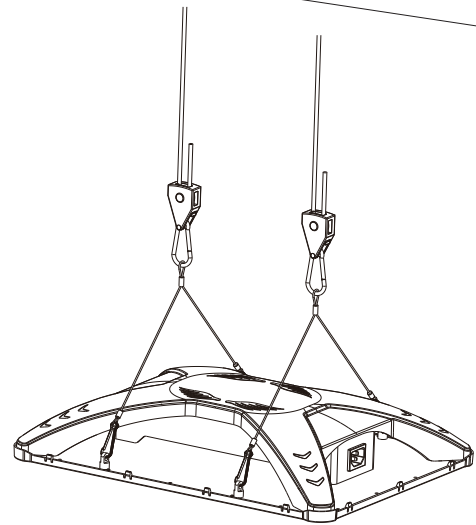


Dimming Function

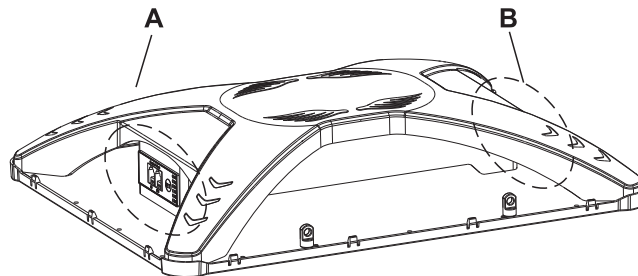


A

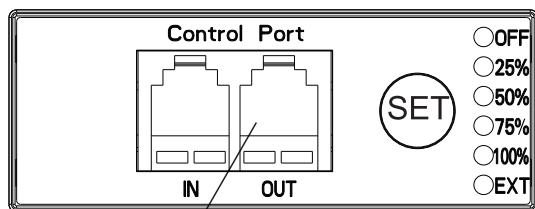



RJ12 port is available for external controller with 0-10V, when you use the SET button and turn to EXT.



B

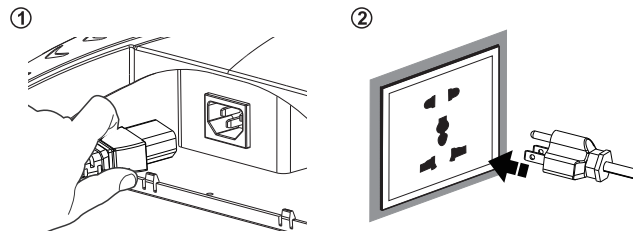

The AC cable must be secured to avoid damage to the connector caused by gravity. The diagram depicts the wire-fixing method is for illustration purposes.



Attention :

1. When taking, moving and installing the lamp, do not touch or use tools on the luminous surface. Please check the LED chip before use.
2. Warning: Please note that the assembly process must ensure the plug-play connector is tightly connected. After the installation is completed, please do a self-check for the confirmation of the connector to prevent poor wire connection and wire burn!
3. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
4. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard