


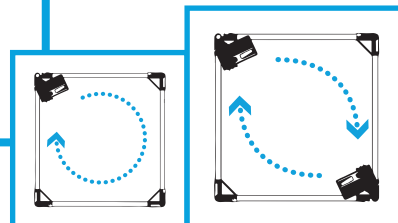

MONKEY FAN 180 mm / 7 inch

MF180

Easiest way to ensure an even air circulation inside your grow tent.

These fans are designed to clip quickly on 16 to 25mm poles (0,63 to 1,00 inch). Enjoy low noise and extended lifetime thanks to the brushless DC 24V motor. The small size of these fans allows you to optimize your grow area. Use them 15° upward or downward to blow air from over or under of the canopy. For larger grow spaces, two can be used to create a circular motion.

VIDEO

REFERENCE	DESIGNATION (METRIC)	DESIGNATION (IMPERIAL)	EFFICIENT RANGE
MF180	Monkey Fan 180 mm	Monkey Fan 7 inch	Up to 3 m

GENERAL DETAILS

Application	Grow tent, grow room, vertical farming
Plant grow stage	Mother plants, growing, blooming
Motor technology	Ball Bearing EC low consumption engine


PLASTIC PART ASSEMBLY



ROBUST GRIP



OPTIMIZED AIR CIRCULATION

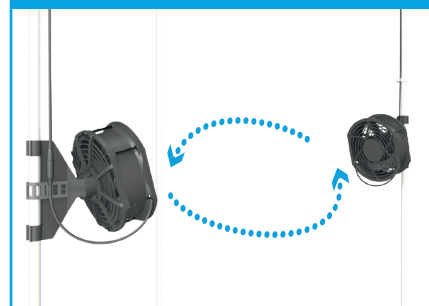

100% safe
24V



Low Consumption
High energy efficiency




Ultra Compact
Design



Long Life
50 000 h



REF	MF180
	
WEIGHT	0.75 kg / 1.65 lb
DIMENSIONS ASSEMBLED	
Length	180 mm / 7,1 inch
Height	180 mm / 7,1 inch
Width	150 mm / 5,9 inch
TUBE CLIP DIAMETER	19 - 25 mm / 0,75 - 1.00 inch
AIRFLOW MAX	285 m³/h / 168 cfm
POWER	
Consumption	6.5 W
Voltage	100-240 V
Frequency	50/60 Hz
Cable Length 24V	240 cm / 94,5 inch
ADAPTERS INCLUDED	
Type	C/G/A Type
Country	UE/UK/US
MOTOR	
Type	Brushless DC
Voltage	24 V
Current	190 mA
Speed	2000 RPM
NOISE*	Max 36,5 dB (A)
LIFETIME	50 000 hours
TEMPERATURE	
Working	15 to 35 °C / 60 to 95 °F
Storing	0 to 50 °C / 30 to 120 °F

* Measured in SJ standard : 70cm from the front of the tent (closed), at 100cm height



secret JARDIN



info@secretjardin.com



Secretjardin_



Secret Jardin Official



Secret Jardin



secretjardin.com